

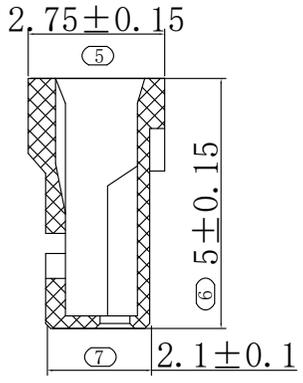
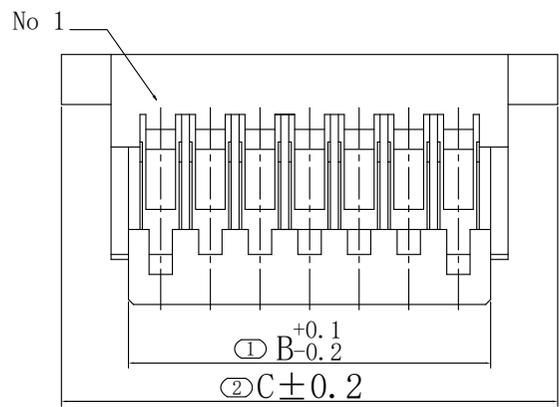
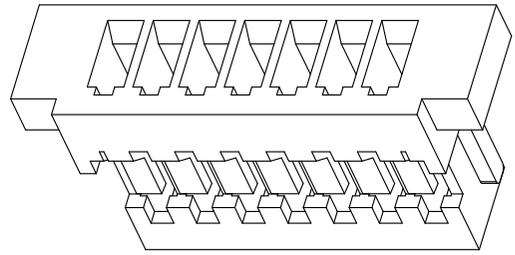


REV.	DESCRIPTION	DATE
A/0	新版发行	2017.01.18

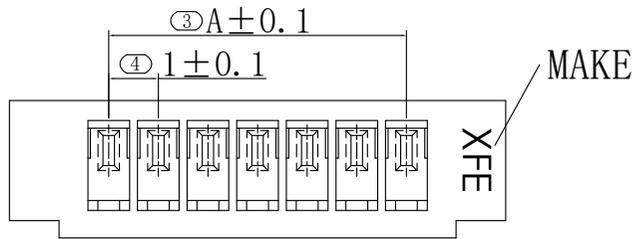

PIN	A	B	C
2	1.0	2.30	5.00
3	2.0	3.30	6.00
4	3.0	4.30	7.00
5	4.0	5.30	8.00
6	5.0	6.30	9.00
7	6.0	7.30	10.00
8	7.0	8.30	11.00
9	8.0	9.30	12.00
10	9.0	10.30	13.00
11	10.0	11.30	14.00
12	11.0	12.30	15.00
13	12.0	13.30	16.00
14	13.0	14.30	17.00
15	14.0	15.30	18.00
16	15.0	16.30	19.00
17	16.0	17.30	20.00
18	17.0	18.30	21.00
19	18.0	19.30	22.00
20	19.0	20.30	23.00

NOTES:  
 1. MATERIAL SEE TABLE;  
 2. PLATING SEE TABLE;  
 3. RATING  
 3-1. OPERATING TEMPERATURE: -25~85°C  
 3-2. OPERATING VOLTAGE: 150V AC/DC  
 3-3. CURRENT RATING: 1.0 AMPS/28#(28#~32#AWG)  
 3-4. DIELECTRIC WITHSTANDING VOLTAGE:  
 800V AC/Minute;  
 3-5. INSULATION RESISTANCE: 1000MΩ Min;  
 3-6. CONTACT RESISTANCE: 0.03Ω Max;

4. PART NO.  
 21005-1H\*\*-1001  
 SERIES  
 PLASTIC PARTS.  
 HOUSING  
 Lead Free & HF  
 1=Lead Free  
 CIRCUIT NO.  
 2-16

借用登记  
 底图总号  
 底图总号  
 签字  
 日期

序号	图号	名称	材料	数量	附注
1	172-1005-001	Y座	PA66 (UL94V-0)	1	本色

GENERAL TOLERANCES		DRAWN BY	赵博群/2017.01.18	 新富尔电子有限公司 XINFUER ELECTORN CO.,LTD	
0.X	±0.25	X.°	±3°		
0.XX	±0.12				
0.XXX	±0.05	X.X°	±0.5°	APRV. BY 洪新江/2017.01.18	
UNIT	SIZE	SCALE	DRAWING NO.	SHEET	PROD. NAME
MM	A4	1:1	072-1005-001	1 OF 1	1.0T-nY
				PART NO.	21005-1H**-1001
TITLE 1.0WTB CONN. SINGLE ROW HOUSING					