






REV.	DESCRIPTION	DATE
A/0	新版发行	2017.01.24

- NOTES:
- MATERIAL SEE TABLE;
  - PLATING SEE TABLE;
  - RATING
  - 3-1. OPERATING TEMPERATURE: -25~85°C
  - 3-2. OPERATING VOLTAGE: 250V AC/DC
  - 3-3. CURRENT RATING: 2.0 AMPS(26#)
  - 3-4. DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC/Minute;
  - 3-5. INSULATION RESISTANCE: 1000MΩ Min;
  - 3-6. CONTACT RESISTANCE: 0.03Ω Max;
  - PART NO.

21033-1H\*\*-1001

SERIES: 21033-1H\*\*-1001  
 PLASTIC PARTS: Lead Free & HF  
 HOUSING: 1&2=Lead Free  
 5&6=Halogen-Free  
 CIRCUIT NO. 8-44

CKT	dim A	dim B	dim C
8	6	8.6	9.6
10	8	10.6	11.6
12	10	12.6	13.6
14	12	14.6	15.6
16	14	16.6	17.6
18	16	18.6	19.6
20	18	20.6	21.6
22	20	22.6	23.6
24	22	24.6	25.6
26	24	26.6	27.6
28	26	28.6	29.6
30	28	30.6	31.6
32	30	32.6	33.6
34	32	34.6	35.6
36	34	36.6	37.6
38	36	38.6	39.6
40	38	40.6	41.6
42	40	42.6	43.6
44	42	44.6	45.6

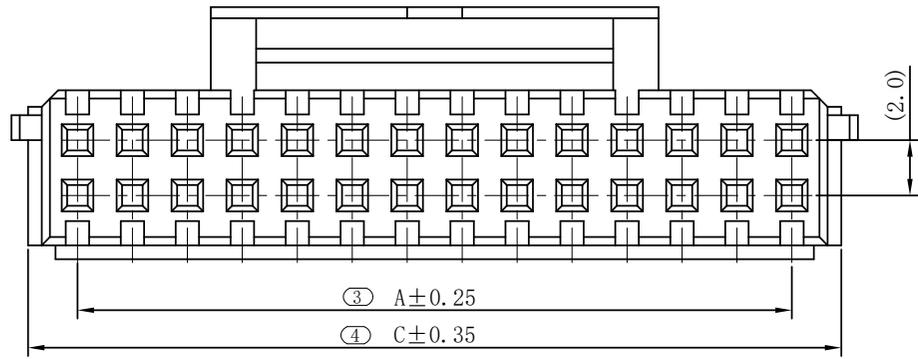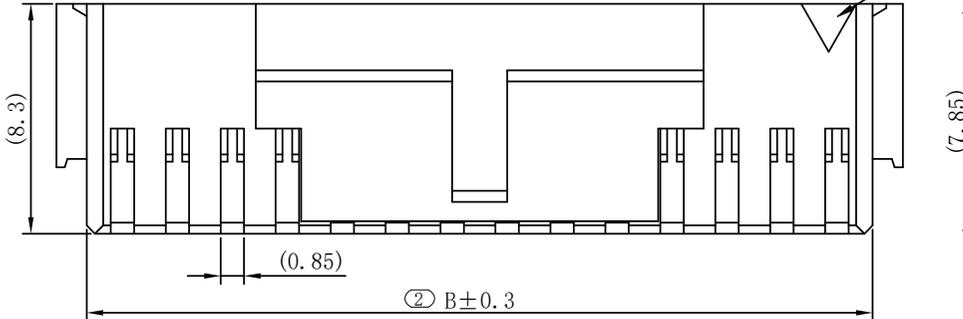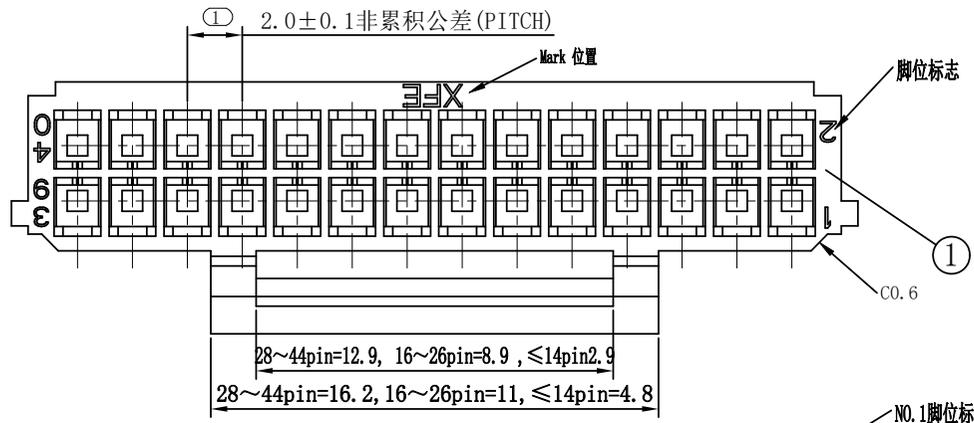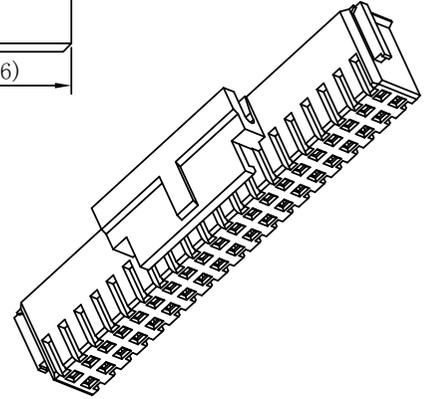

借用登记  
 旧底图总号  
 底图总号  
 签字  
 日期

1	172-1035-001	基座 Wafer	PA66(UL94V-0)	1	纯
序号	图号	名称	材料	数量	附注
GENERAL TOLERANCES		DRAWN BY 赵博群/2017.01.24	新富尔电子有限公司 XINFUER ELECTRON CO.,LTD		
0.X	±0.25	X.° ±3°			
0.XX	±0.12				
0.XXX	±0.05	X.X° ±0.5°	APRV. BY 洪新江/2017.01.24	SHEET 1 OF 1	PROD. NAME PHD-2XnY-DK
UNIT MM	SIZE A4	SCALE 1:1	DRAWING NO. 006-1033-001	PART NO. 21033-1H**-1001	TITLE 2.0WTB CONN. DUAL ROW HOUSING