
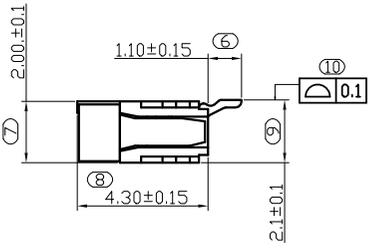


0 9 8 7 6 5 4 3 2 1

REV.	DESCRIPTION	DATE
B/0	升B版	2017.01.11



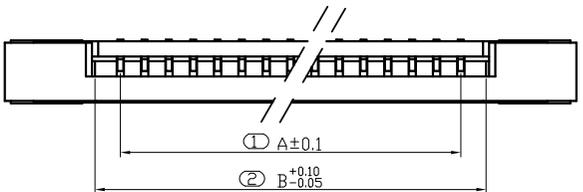


- NOTES:
- MATERIAL SEE TABLE;
  - PLATING SEE TABLE;
  - RATING
  - 3-1. OPERATING TEMPERATURE: -25~85°C
  - 3-2. OPERATING VOLTAGE: 50V AC/DC
  - 3-3. CURRENT RATING: 0.5 AMPS
  - 3-4. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC/Minute;
  - 3-5. INSULATION RESISTANCE: 500MΩ Min;
  - 3-6. CONTACT RESISTANCE: 0.03Ω Max;
  - PART NO.



60034-\*\*-01-5001  
 SERIES  
 CIRCUIT NO.  
 Packing Option:  
 0=Reel Packing  
 1=Tube Packing

Lead Free & HF  
 5=Halogen-Free

Plating:  
 1=BRIGHT-TIN 80μ"Min  
 OVER Ni 30μ"Min..

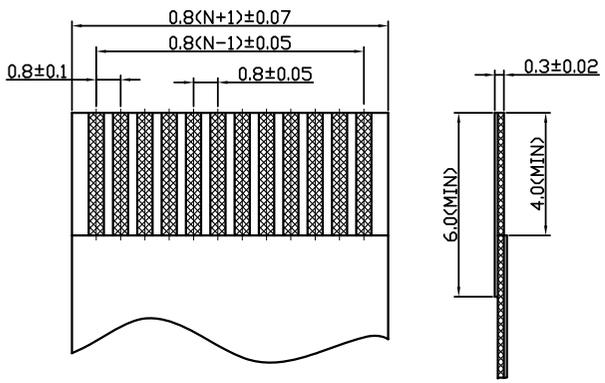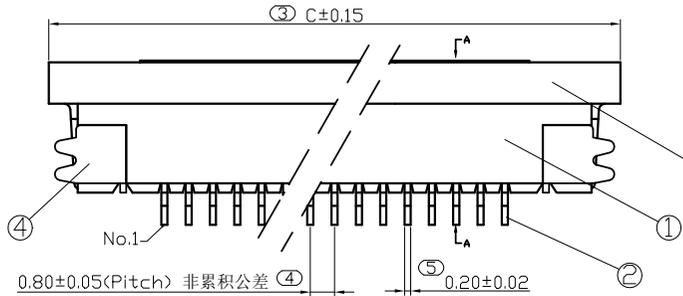

适用FPC寸法  
 APPLICABLE FPC

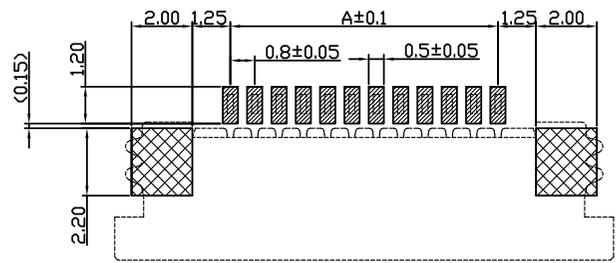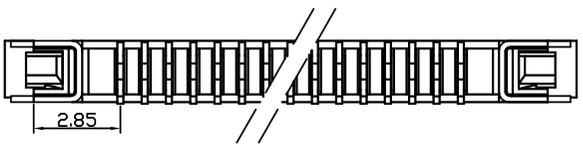

适用线路板  
 RECOMMENDED PCB LAYOUT

CKT	DimA	DimB	DimC
5	3.2	4.86	10.8
7	4.8	6.46	12.4
8	5.6	7.26	13.4
10	7.2	8.86	14.8

借用登记  
 旧底图总号  
 底图总号  
 签字  
 日期

4	122-0005-001	焊片 Fitting Nail	磷青铜 Phosphor Bronze	2	电镀(锡): 整个表面镀底镍30u"Min,再镀锡80u"Min..
3	142-0034-001	铜扣 Actuator	LCP(UL94V-0)	1	棕色
2	112-0005-001	端子 Contact	磷青铜 Phosphor Bronze	n×1	电镀(锡): 整个表面镀底镍30u"Min,再镀锡80u"Min..
1	132-0034-001	基座 Housing	LCP(UL94V-0)	1	棕色
序号	图号	名称	材料	数量	附注

GENERAL TOLERANCES			DRAWN BY	赵博群/2017.01.11	
0.X	±0.25	X.°	±3°	CHK. BY	崔华文/2017.01.11
0.XX	±0.12			APRV. BY	洪新江/2017.01.11
0.XXX	±0.05	X.X°	±0.5°	SHEET	PROD. NAME 0.8A-nPBX-AL
UNIT	SIZE	SCALE	DRAWING NO.	1 OF 1	PART NO. 60034-**-01-5001
MM	A4	1:1	006-0034-002	TITLE 0.8 FPC CONN. ZIF SMT DRAWER H=2.0 LOWER CONTACT	

**ZXF E** 新富尔电子有限公司  
 XINFUER ELECTORN CO.,LTD

0 9 8 7 6 5 4 3 2 1