



# 0.8A 卧贴连带包装规格

REV.	DESCRIPTION	DATE
B/0	升B版	2017.02.17

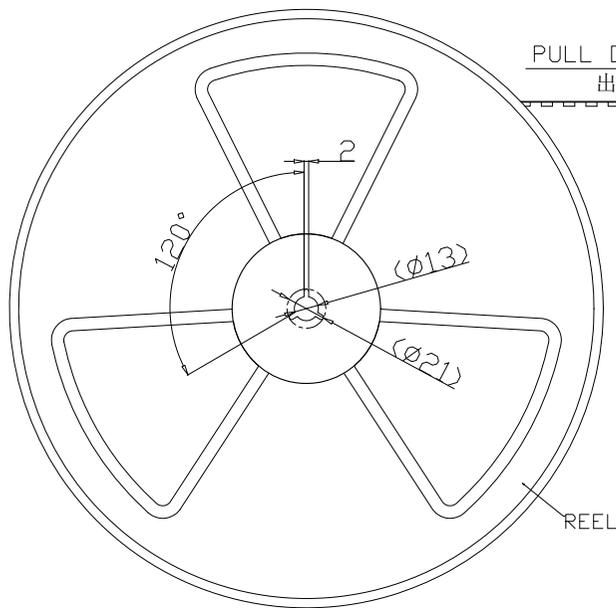

PULL OUT DIRECTION  
出料方向

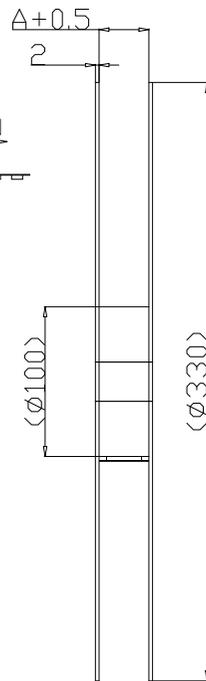

Note:

- 1.Sprocket holes pitch cumulative tolerance  $\pm 0.1$ . (Accumulative Pitch  $\pm 0.2$ )
- 2.Carrier camber is within 1mm in 100mm.
- 3.Number of connectors: 2000Pcs/REEL
- 4.All dimensions meet EIA-481-D requirements.
- 5.Thick ness: $0.4 \pm 0.1$ mm.
- 6.Material of top fape: PET, PE, PEF
- 7.Material of carrier fape: Poystyrene
- 8.For tape width (dimension A) 16mm and 24mm a pilot hole is provided on one side. For tape width (dimension A) 32mm and 44mm pilot holes are provided on both sides.





载带带头及带尾尺寸  
Lead tape length



载带上下带剥离强度: 0.2N—1.0N(10g-100g)  
Peeling off force of top tape:  
0.2N—1.0N(10g-100g)


ROHS管理规定:

1. 禁止使用含有ROHS指令所限制的物质。
2. 对应的SGS或ITS出具的ICP-AES数据、不可测定物质的成分表, 有效期一年。

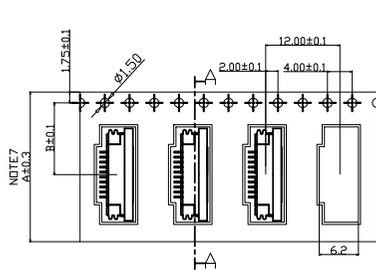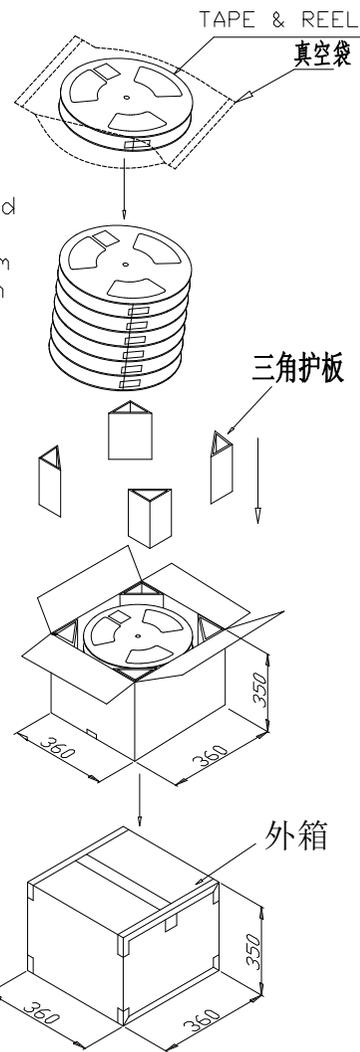

PULL OUT DIRECTION  
出料方向

宽度: 16mm/24mm 载带

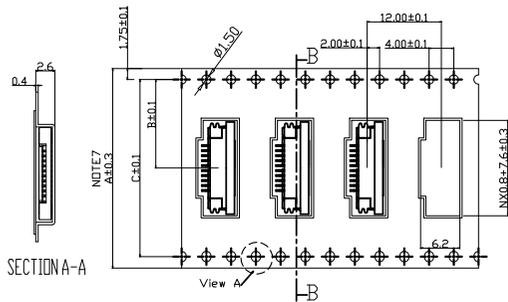

PULL OUT DIRECTION  
出料方向

宽度: 32mm及以上 载带

借用登记

旧底图总号

底图总号

签字

日期

芯数 Pin (n)	PART NO.	尺寸 Size		
		A	B	C
5-8	60034/60035-0501-#001—60034/60035-0801-#001	24.0	11.5	---
		32.0	14.2	28.4
		44.0	20.2	40.4
		56.0	26.2	52.4

PART No.	60034-**-#001 60035-**-#001
REEL WIDTH	24
PCS/REEL	2000
REEL/BOX	12
BOX/PCS	24K
CTN. SIZE	360*360*350

GENERAL TOLERANCES		
0.X	$\pm 0.25$	X° $\pm 3^\circ$
0.XX	$\pm 0.12$	
0.XXX	$\pm 0.05$	X.X° $\pm 0.5^\circ$
UNIT	MM	SCALE
	A4	1:1

DRAWN BY	赵博博/2017.02.17
CHK. BY	崔华文/2017.02.17
APRV. BY	洪新江/2017.02.17
DRAWING NO.	004-0034-001

		新富尔电子有限公司 XINFUER ELECTORN CO.,LTD	
SHEET	1 OF 1	PROD. NAME	0.8A-nPBX/nPBS
PART NO.		60034/60035-**-#001	
TITLE			
0.8 FPC CONN. ZIF SMT DRAWER H=2.0 LOWER CONTACT			