
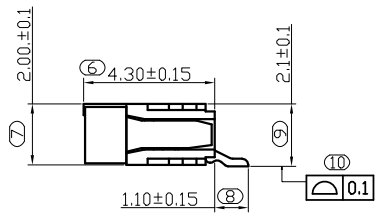


0 9 8 7 6 5 4 3 2 1

REV.	DESCRIPTION	DATE
B/0	升B版	2017.01.11

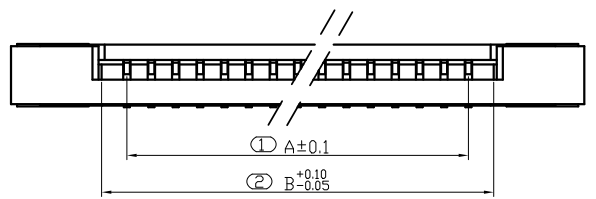




- NOTES:
- MATERIAL SEE TABLE;
  - PLATING SEE TABLE;
  - RATING
  1. OPERATING TEMPERATURE:  $-25 \sim 85^{\circ}\text{C}$
  2. OPERATING VOLTAGE: 50V AC/DC
  3. CURRENT RATING: 0.5 AMPS
  4. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC/Minute;
  5. INSULATION RESISTANCE:  $500\text{M}\Omega$  Min;
  6. CONTACT RESISTANCE:  $0.03\Omega$  Max;
- PART NO.

60035-\*\*01-5001


SERIES: Lead Free & HF  
5=Halogen-Free

CIRCUIT NO. Plating:  
1=BRIGHT-TIN  $80\mu\text{Min}$   
OVER Ni  $30\mu\text{Min}$ .

Packing Option:  
0=Reel Packing  
1=Tube Packing

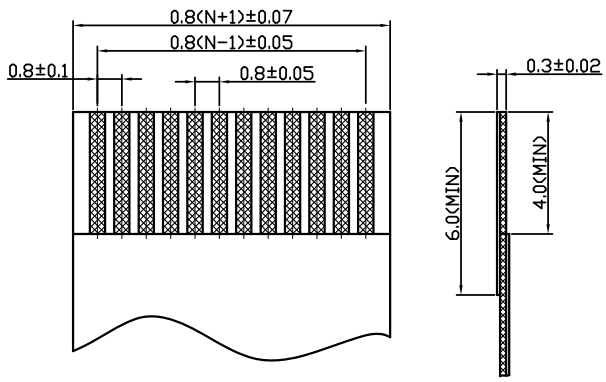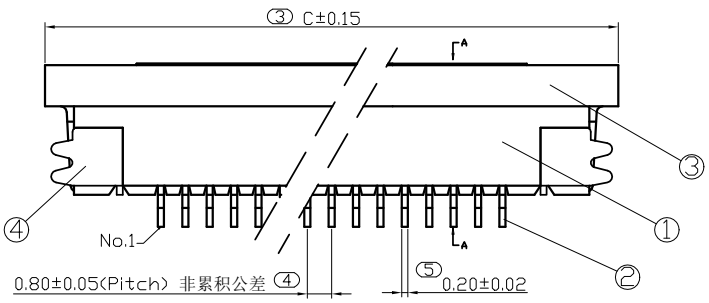

适用FPC寸法  
APPLICABLE FPC

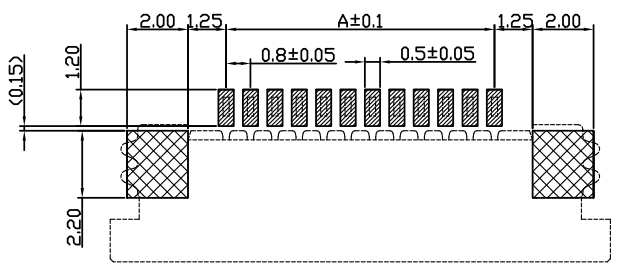

适用线路板  
RECOMMENDED PCB LAYOUT

CKT	DimA	DimB	DimC
5	3.2	4.86	10.8
7	4.8	6.46	12.4
8	5.6	7.26	13.4
10	7.2	8.86	14.8

借用登记  
旧底图总号  
底图总号  
签字  
日期

4	122-0005-001	焊片 Fitting Nail	磷青铜 Phosphor Bronze	2	电镀(铜): 整个表面镀底镍30u"Min,再镀铜80u"Min..
3	142-0034-001	喇叭 Actuator	LCP(UL94V-0)	1	黑色
2	112-0006-001	端子 Contact	磷青铜 Phosphor Bronze	n×1	电镀(铜): 整个表面镀底镍30u"Min,再镀铜80u"Min..
1	132-0034-001	基座 Housing	LCP(UL94V-0)	1	棕色
序号	图号	名称	材料	数量	附注

GENERAL TOLERANCES			DRAWN BY	赵博群/2017.01.11	
0.X	$\pm 0.25$	X. $^{\circ}$	$\pm 3^{\circ}$	CHK. BY	崔华文/2017.01.11
0.XX	$\pm 0.12$			APRV. BY	洪新江/2017.01.11
0.XXX	$\pm 0.05$	X.X $^{\circ}$	$\pm 0.5^{\circ}$	SHEET	PROD. NAME 0.8A-nPBS-AL
UNIT	SIZE	SCALE	DRAWING NO.	1 OF 1	PART NO. 60035-**01-5001
MM	A4	1:1	006-0035-002	TITLE 0.8 FPC CONN. ZIF SMT DRAWER H=2.0 UPPER CONTACT	

ZIF XFE 新富尔电子有限公司  
XINFUER ELECTORN CO.,LTD

0 9 8 7 6 5 4 3 2 1