REV.	DESCRIPTION	DATE
B/0	升 B 版	2017.01.03

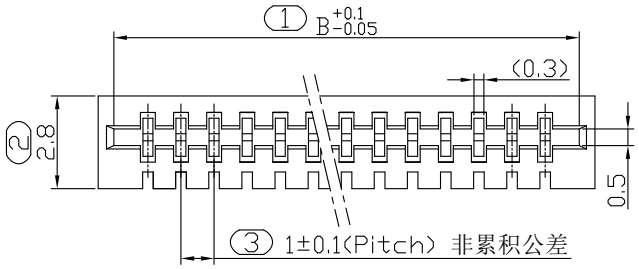



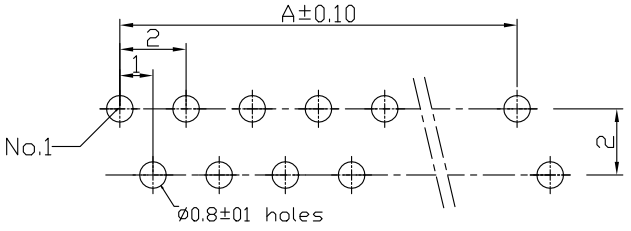

适用线路板
RECOMMENDED PCB LAYOUT

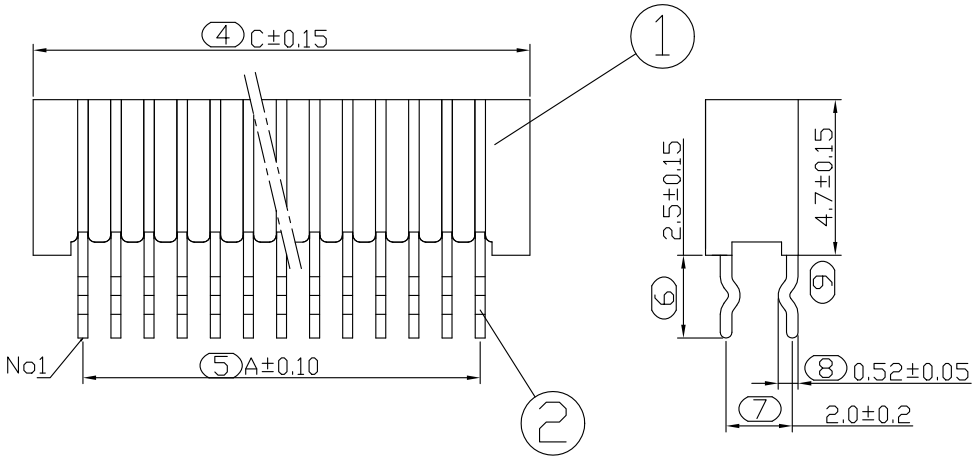

NOTES:
1. MATERIAL SEE TABLE;
2. PLATING SEE TABLE;
3. RATING
3-1. OPERATING TENPERATURE:-25~85°C
3-2. OPERATING VOLTAGE: 50V AC/DC
3-3. CURRENT RATING: 1.0 AMPS
3-4. DIELECTRIC WITHSTANGING VILTAGE: 500V AC/Minute;
3-5. INSULATION RESISTANCE:500MΩ Min;
3-6. CONTACT RESISTANCE:0.03Ω Max;
4. PART NO.

60040-**11-1001
- SERIES
- CIRCUIT NO. 04-40
- Packing Option: 1=Tube Packing
- Lead Free & HF 1=Lead Free
- Plating: 1=BRIGHT-TIN 80μ"Min OVER Ni 30μ"Min..

CKT	Dim A	Dim B	Dim C
4	3	5.06	6
5	4	6.06	7
6	5	7.06	8
7	6	8.06	9
8	7	9.06	10
9	8	10.06	11
10	9	11.06	12
11	10	12.06	13
12	11	13.06	14
13	12	14.06	15
14	13	15.06	16
15	14	16.06	17
16	15	17.06	18
17	16	18.06	19
18	17	19.06	20
19	18	20.06	21
20	19	21.06	22
21	20	22.06	23
22	21	23.06	24
23	22	24.06	25

CKT	Dim A	Dim B	Dim C
24	23	25.06	26
25	24	26.06	27
26	25	27.06	28
27	26	28.06	29
28	27	29.06	30
29	28	30.06	31
30	29	31.06	32
31	30	32.06	33
32	31	33.06	34
33	32	34.06	35
34	33	35.06	36
35	34	36.06	37
36	35	37.06	38
37	36	38.06	39
38	37	39.06	40
39	38	40.06	41
40	39	41.06	42

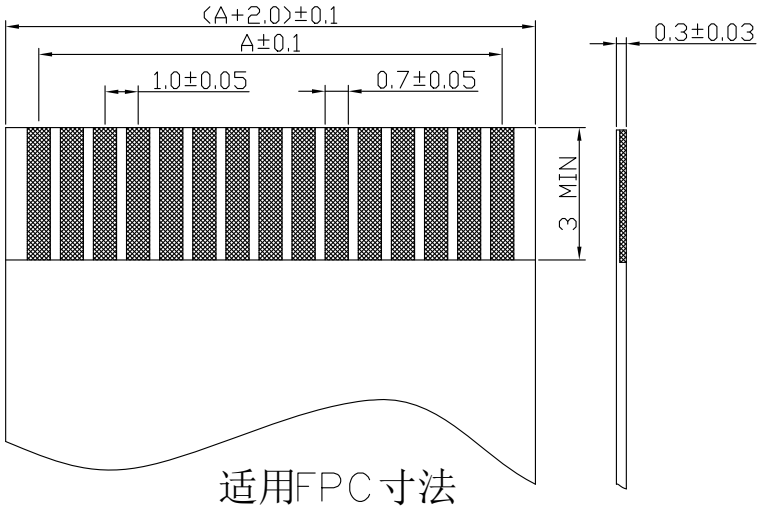

适用FPC寸法
APPLICABLE FPC

序号	图号	名称	材料	数量	附注
2	112-0040-001	端子 Contact	磷青铜 Phosphor Bronze	n×1	电镀(镍): 整个表面镀底镍30u"MIN,再镀锡80u".MIN.
1	132-0040-001	基座 Housing	PA9T (UL94V-0)	1	黑色

GENERAL TOLERANCES				DRAWN BY	赵婷婷/2017.01.03
0.X	±0.25	X.°	±3°	CHK. BY	崔华文/2017.01.03
0.XX	±0.12			APRV. BY	洪新江/2017.01.03
0.XXX	±0.05	X.X°	±0.5°		

UNIT	SIZE	SCALE
MM	A4	1:1

DRAWING NO. 006-0040-001

新富尔电子有限公司
XINFUER ELECTORN CO.,LTD

SHEET 1 OF 1 | PROD. NAME 1.0B-nPL | PART NO. 60040-**11-1001

TITLE 1.0 FPC CONN. NON-ZIF DIP H=4.7 VERTICAL CONTACT

借用登记
旧底图总号
底图总号
签 字
日 期