

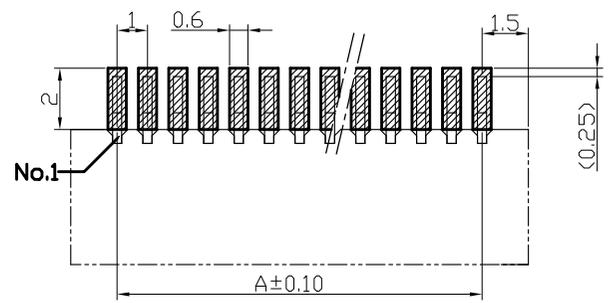

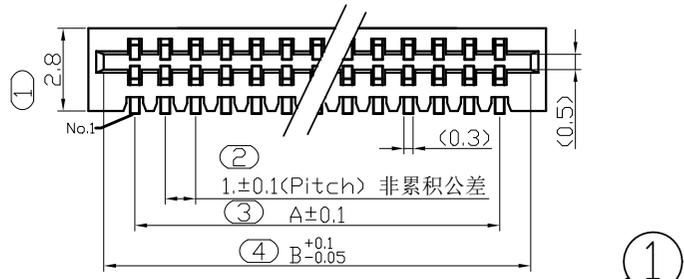


REV.	DESCRIPTION	DATE
B/0	升 B 版	2017.01.02




适用线路板
RECOMMENDED PCB LAYOUT

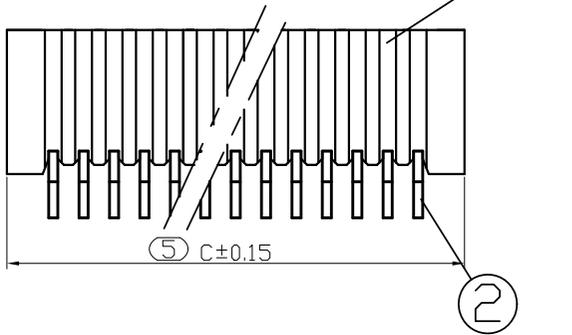

- NOTES:
- MATERIAL SEE TABLE;
 - PLATING SEE TABLE;
 - RATING
 - 3-1. OPERATING TEMPERATURE: -25~85°C
 - 3-2. OPERATING VOLTAGE: 50V AC/DC
 - 3-3. CURRENT RATING: 1.0 AMPS
 - 3-4. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC/Minute;
 - 3-5. INSULATION RESISTANCE: 500MΩ Min;
 - 3-6. CONTACT RESISTANCE: 0.03Ω Max;
 - PART NO. 60044-**01-1001
- SERIES: Lead Free & HF 1=Lead Free
- CIRCUIT NO. 04-40
- Plating: 1=BRIGHT-TIN 80 μ Min OVER Ni 30 μ Min..
- Packing Option:
0=Reel Packing
1=Tube Packing

CKT	Dim A	Dim B	Dim C	CKT	Dim A	Dim B	Dim C
4	3	5.06	6	24	23	25.06	26
5	4	6.06	7	25	24	26.06	27
6	5	7.06	8	26	25	27.06	28
7	6	8.06	9	27	26	28.06	29
8	7	9.06	10	28	27	29.06	30
9	8	10.06	11	29	28	30.06	31
10	9	11.06	12	30	29	31.06	32
11	10	12.06	13	31	30	32.06	33
12	11	13.06	14	32	31	33.06	34
13	12	14.06	15	33	32	34.06	35
14	13	15.06	16	34	33	35.06	36
15	14	16.06	17	35	34	36.06	37
16	15	17.06	18	36	35	37.06	38
17	16	18.06	19	37	36	38.06	39
18	17	19.06	20	38	37	39.06	40
19	18	20.06	21	39	38	40.06	41
20	19	21.06	22	40	39	41.06	42
21	20	22.06	23				
22	21	23.06	24				
23	22	24.06	25				

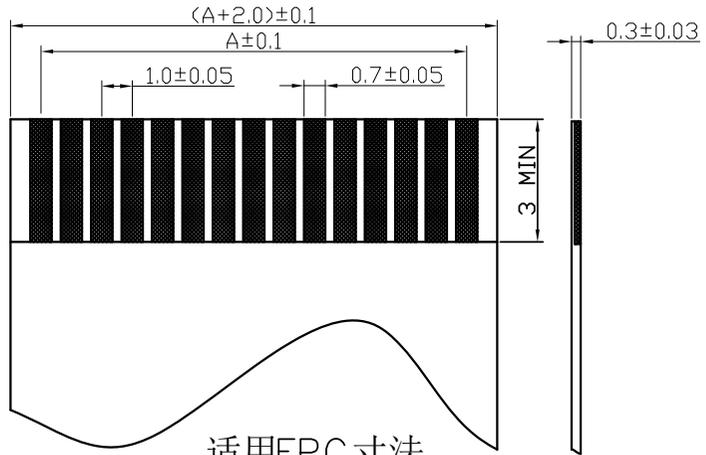

适用FPC寸法
APPLICABLE FPC

2	112-0044-001	接触 Contact	磷磷 Phosphor Bronze*1	数量: 数量 30u"MIN, 数量 30u"MIN
1	132-0040-001	插座 Housing	PA9T	数量: 数量

序号	图号	名称	材料	数量	附注
GENERAL TOLERANCES		DRAWN BY	赵婷婷/2017.01.02		
0.X	±0.25	X.*	±3°	CHK. BY	崔华文/2017.01.02
0.XX	±0.12			APRV. BY	洪新江/2017.01.02
0.XXX	±0.05	X.X*	±0.5°	SHEET	PROD. NAME 1.0B-nPWB
UNIT	SIZE	SCALE	DRAWING NO.	1 OF 1	PART NO. 60044-**01-1001
MM	A4	1:1	006-0044-002	TITLE 1.0 FPC CONN. NON-ZIF SMT H=2.8 RIGHT-ANGLE CONTACT	

ZIF XFE 新富尔电子有限公司
XINFUER ELECTORN CO.,LTD

借用登记
旧底图总号
底图总号
签字
日期