

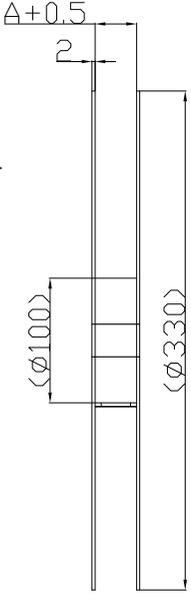


REV.	DESCRIPTION	DATE
B/0	升B版	2017.02.20

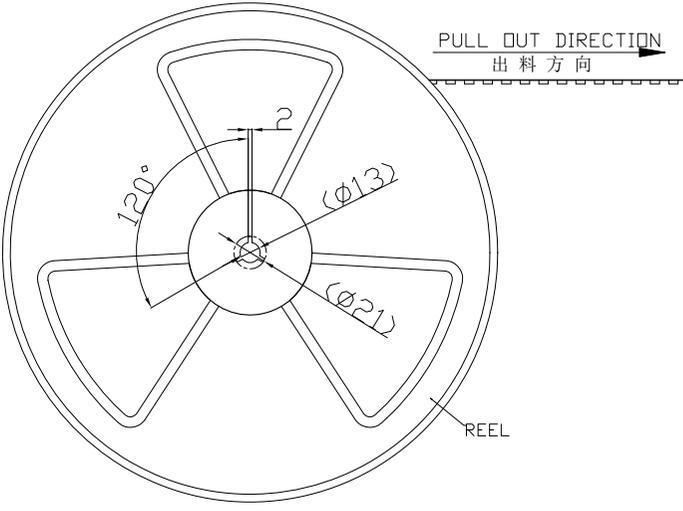



- Note:
- 1.Sprocket holes pitch cumulative tolerance ± 0.1 . (Accumulative Pitch ± 0.2)
 - 2.Carrier camber is within 1mm in 100mm.
 - 3.Number of connectors: 1500Pcs/REEL
 - 4.All dimensions meet EIA-481-D requirements.
 - 5.Thick ness: 0.4 ± 0.1 mm.
 - 6.Material of top fape: PET, PE, PEF
 - 7.Material of carrier fape: Poystyrene
 - 8.For tape width (dimension A) 16mm and 24mm a pilot hole is provided on one side. For tape width (dimension A) 32mm and 44mm pilot holes are provided on both sides.

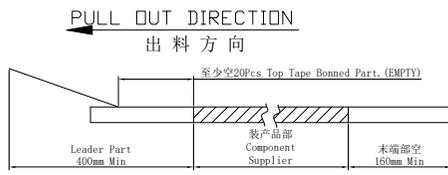


载带带头及带尾尺寸
Lead tape length



载带上下带剥离强度: 0.1N--1.3N (10g-130g)
Peeling off force of top tape:
0.1N--1.3N (10g-130g)

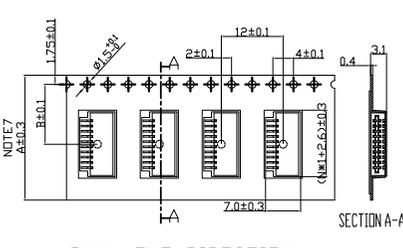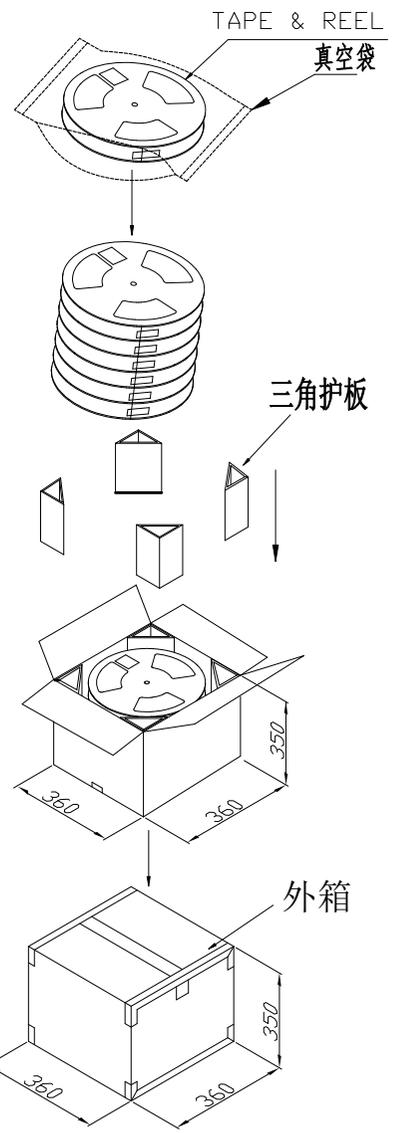

宽度: 16mm/24mm 载带

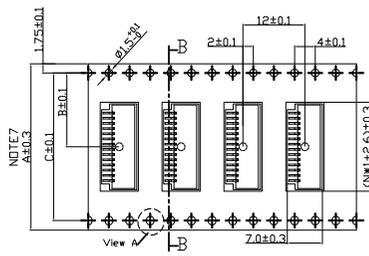


宽度: 32mm及以上 载带

借用登记
旧底图总号
底图总号

芯数 Pin (n)	PART NO.	尺寸 Size		
		A	B	C
4-5	60044-040*-*****-60044-050*-*****	16.0	7.5	---
6-13	60044-060*-*****-60044-130*-*****	24.0	11.5	---
15-18	60044-150*-*****-60044-180*-*****	32.0	14.2	28.4
24-28	60044-240*-*****-60044-280*-*****	44.0	20.2	40.4
35	60044-350*-*****	56.0	26.2	52.4

PART No.	60044-*(0)*-*****				
REEL WIDTH	16	24	32	44	56
PCS/REEL	1500				
REEL/BOX	16	12	9	7	5
BOX/PCS	24K	18K	13.5K	10.5K	7.5K
CTN. SIZE	360*360*350				

GENERAL TOLERANCES			DRAWN BY	赵博博/2017.02.20
0.X	± 0.25	X. $^{\circ}$	$\pm 3^{\circ}$	CHK. BY
0.XX	± 0.12			崔华文/2017.02.20
0.XXX	± 0.05	X.X $^{\circ}$	$\pm 0.5^{\circ}$	APRV. BY
				洪新江/2017.02.20
UNIT	SIZE	SCALE	DRAWING NO.	
MM	A4	1:1	004-0044-001	

 新富尔电子有限公司 XINFUER ELECTORN CO.,LTD	
SHEET	PROD. NAME 1.0B-nPWB
1 OF 1	PART NO. 30044-*(0)*-*****
TITLE 1.0 FPC CONN. NON-ZIF SMT H=2.8 RIGHT-ANGLE CONTACT	