

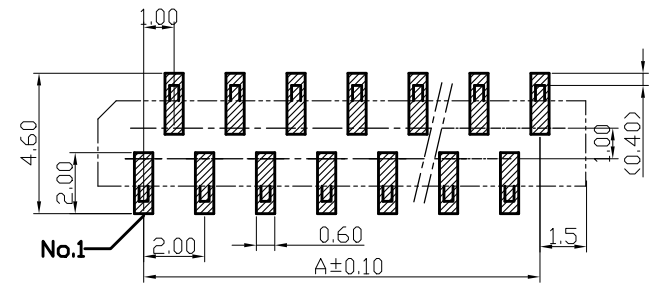


REV.	DESCRIPTION	DATE
B/0	升 B 版	2017.01.02

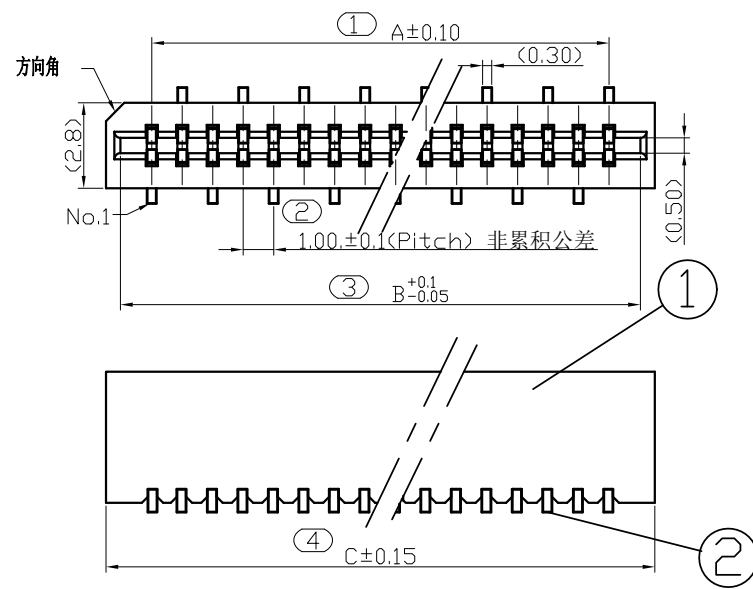

适用线路板
RECOMMENDED PCB LAYOUT

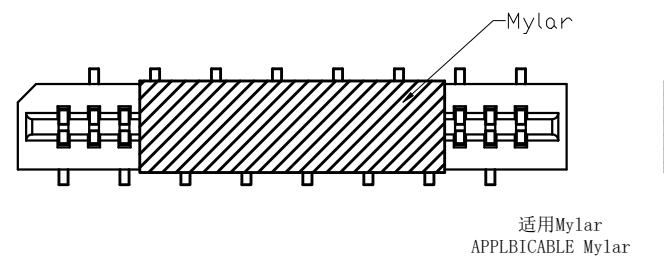

- NOTES:
- MATERIAL SEE TABLE;
 - PLATING SEE TABLE;
 - RATING
 - 3-1. OPERATING TEMPERATURE: -25~85°C
 - 3-2. OPERATING VOLTAGE: 50V AC/DC
 - 3-3. CURRENT RATING: 1.0 AMPS
 - 3-4. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC/Minute;
 - 3-5. INSULATION RESISTANCE: 500MΩ Min;
 - 3-6. CONTACT RESISTANCE: 0.03Ω Max;
 - PART NO.
- 60045-**01-1001
- SERIES: 04-40
- CIRCUIT NO.:
- Packing Option:
0=Reel Packing
1=Tube Packing
- Lead Free & HF
1=Lead Free
- Plating:
1=BRIGHT-TIN
80μ"Min OVER Ni
30μ"Min..

CKT	Dim A	Dim B	Dim C	Dim D	CKT	Dim A	Dim B	Dim C	Dim D
4	3	5.06	6	5	24	23	25.06	26	25
5	4	6.06	7	6	25	24	26.06	27	26
6	5	7.06	8	7	26	25	27.06	28	27
7	6	8.06	9	8	27	26	28.06	29	28
8	7	9.06	10	9	28	27	29.06	30	29
9	8	10.06	11	10	29	28	30.06	31	30
10	9	11.06	12	11	30	29	31.06	32	31
11	10	12.06	13	12	31	30	32.06	33	32
12	11	13.06	14	13	32	31	33.06	34	33
13	12	14.06	15	14	33	32	34.06	35	34
14	13	15.06	16	15	34	33	35.06	36	35
15	14	16.06	17	16	35	34	36.06	37	36
16	15	17.06	18	17	36	35	37.06	38	37
17	16	18.06	19	18	37	36	38.06	39	38
18	17	19.06	20	19	38	37	39.06	40	39
19	18	20.06	21	20	39	38	40.06	41	40
20	19	21.06	22	21	40	39	41.06	42	41
21	20	22.06	23	22					
22	21	23.06	24	23					
23	22	24.06	25	24					


借用登记

旧底图总号

底图总号

签字

日期

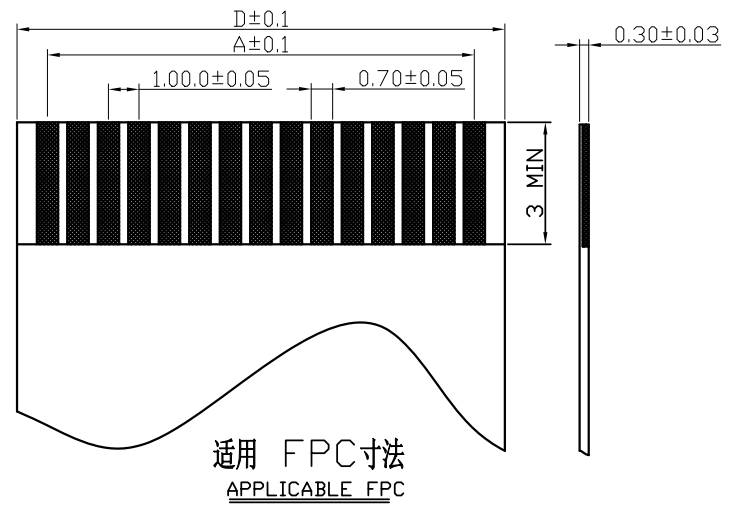

2	112-0045-002	端子 Contact	磷青铜 Phosphor Bronze	n×1	电镀(锡): 整个表面镀层30u"MIN,再镀锡 80u"MIN..
1	132-0040-001	基座 Housing	PA9T(UL94V-0)	1	黑色
序号	图号	名称	材料	数量	附注

GENERAL TOLERANCES

0.X ±0.25 X.° ±3°

0.XX ±0.12

0.XXX ±0.05 X.X° ±0.5°

DRAWN BY 赵婷婷/2017.01.02

CHK. BY 崔华文/2017.01.02

APRV. BY 洪新江/2017.01.02

DRAWING NO. 006-0045-001

SHEET 1 OF 1

PROD. NAME 1.0B-nPLB

PART NO. 60045-**01-1001

TITLE 1.0 FPC CONN. NON-ZIF SMT H=4.3 VERTICAL CONTACT

新富尔电子有限公司
XINFUER ELECTORN CO.,LTD