

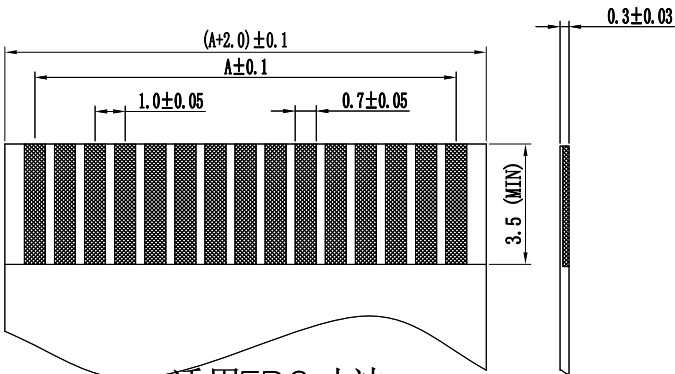
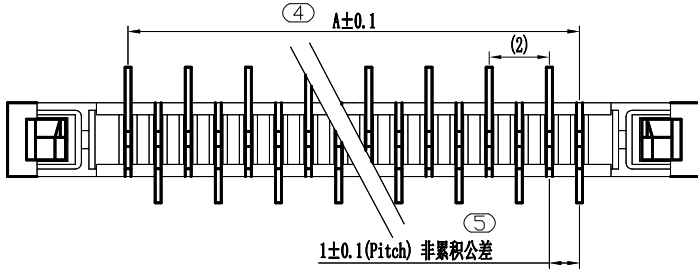
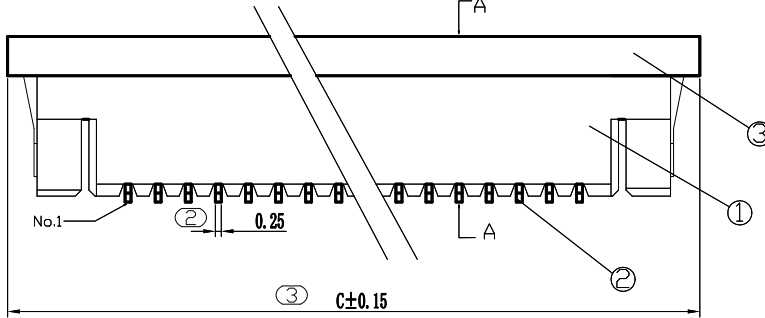
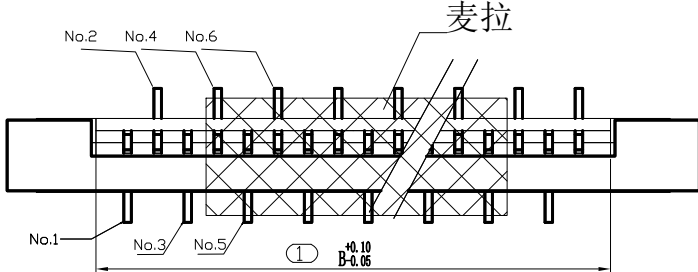


REV.	DESCRIPTION	DATE
B/0	升B版	2017.01.07

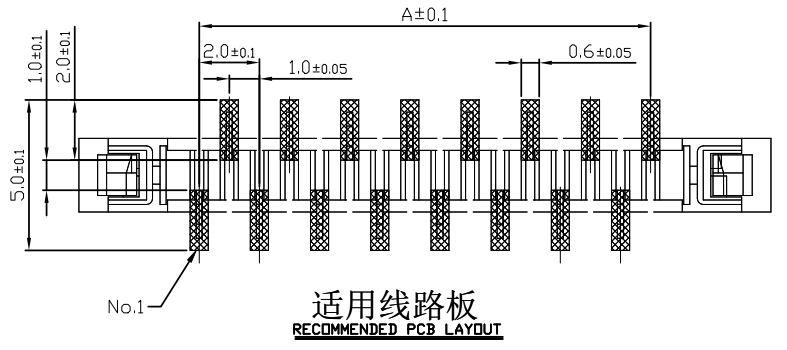

适用FPC寸法
APPLICABLE FPC



- NOTES:
- MATERIAL SEE TABLE;
 - PLATING SEE TABLE;
 - RATING
 - 3-1. OPERATING TEMPERATURE: $-25 \sim 85^{\circ}\text{C}$
 - 3-2. OPERATING VOLTAGE: 125V AC/DC
 - 3-3. CURRENT RATING: 1.0 AMPS
 - 3-4. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC/Minute;
 - 3-5. INSULATION RESISTANCE: 500M Ω Min;
 - 3-6. CONTACT RESISTANCE: 0.03 Ω Max;
 - PART NO. 60054-**01-5001
- SERIES: Lead Free & HF 5=Halogen-Free
- Plating: 1=BRIGHT-TIN 80 μ Min OVER Ni 30 μ Min..
- Packing Option: 0=Reel Packing 1=Tube Packing

CKT	Dim A	Dim B	Dim C	CKT	Dim A	Dim B	Dim C
4	3	5.06	11	23	22	24.06	30
5	4	6.06	12	24	23	25.06	31
6	5	7.06	13	25	24	26.06	32
7	6	8.06	14	26	25	27.06	33
8	7	9.06	15	27	26	28.06	34
9	8	10.06	16	28	27	29.06	35
10	9	11.06	17	29	28	30.06	36
11	10	12.06	18	30	29	31.06	37
12	11	13.06	19	31	30	32.06	38
13	12	14.06	20	32	31	33.06	39
14	13	15.06	21	33	32	34.06	40
15	14	16.06	22	34	33	35.06	41
16	15	17.06	23	35	34	36.06	42
17	16	18.06	24	36	35	37.06	43
18	17	19.06	25	37	36	38.06	44
19	18	20.06	26	38	37	39.06	45
20	19	21.06	27	39	38	40.06	46
21	20	22.06	28	40	39	41.06	47
22	21	23.06	29				

序号	图号	名称	材料	数量	附注
3	142-0052-001	驱动 Actuator	LCPIUL94V-0)	1	黑色
2	112-0054-001	端子 Contact	磷青铜 Phosphor Bronze	n x 1	电镀: 整个表面镀底镍30u"MIN, 再镀锡80u"MIN.
1	132-0052-001	基板 Housing	LCPIUL94V-0)	1	棕色

GENERAL TOLERANCES		DRAWN BY	赵博博/2017.01.07		
0.X	± 0.25	X. $^{\circ}$	$\pm 3^{\circ}$	CHK. BY	崔华文/2017.01.07
0.XX	± 0.12			APRV. BY	洪新江/2017.01.07
0.XXX	± 0.05	X.X $^{\circ}$	$\pm 0.5^{\circ}$	DRAWING NO.	006-0054-003
UNIT	MM	SIZE	A4	SCALE	1:1
		DRAWING NO.		1 OF 1	
		PART NO.		60054-**01-5001	
		TITLE		1.0 FPC CONN. ZIF SMT FRONTFLIP H=5.5 VERTICAL CONTACT	

ZIF XFE 新富尔电子有限公司
XINFUER ELECTORN CO.,LTD

借用登记
旧底图总号
底图总号
签字
日期