

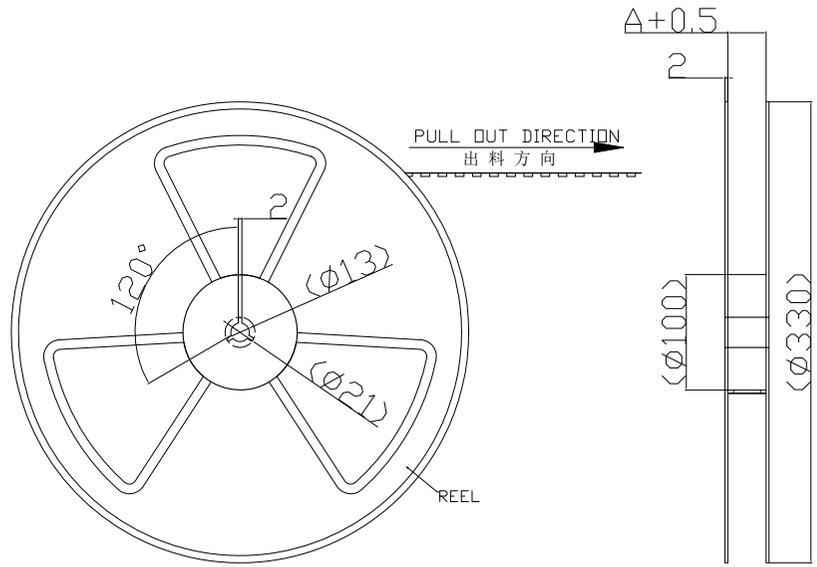


| REV. | DESCRIPTION | DATE       |
|------|-------------|------------|
| B/0  | 升B版         | 2017.06.21 |
|      |             |            |
|      |             |            |

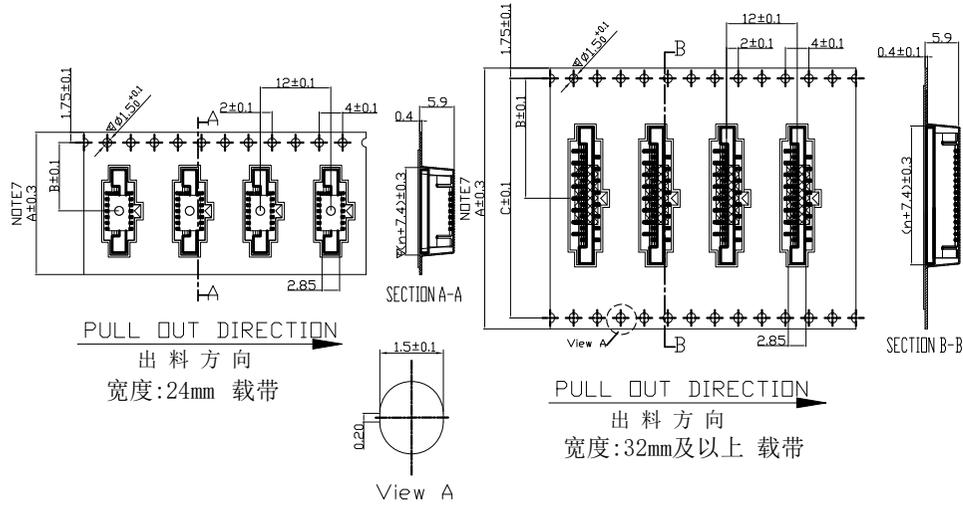

Note:  
 1.Sprocket holes pitch cumulative tolerance  $\pm 0.1$ . (Accumulative Pitch  $\pm 0.2$ )  
 2.Carrier camber is within 1mm in 100mm.  
 3.All dimensions meet EIA-481-D requirements.  
 4.Thick ness:  $0.4 \pm 0.1$ mm.  
 5.Material of top fape: PET, PE, PEF  
 6.Material of carrier fape: Poystyrene  
 7.For tape width (dimension A) 16mm and 24mm a pilot hole is provided on one side. For tape width (dimension A) 32mm and 44mm pilot holes are provided on both sides.

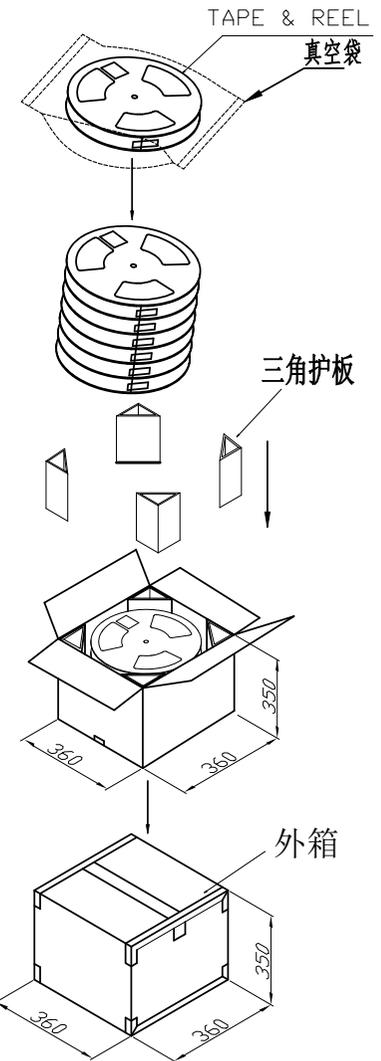

载带带头及带尾尺寸  
 Lead tape length

PULL OUT DIRECTION  
 出料方向

剥离方向  
 Peel Off Direction

载带上下带剥离强度: 0.1N--1.3N (10g-130g)  
 Peeling off force of top tape:  
 0.1N--1.3N (10g-130g)

借用登记  
 旧底图总号  
 底图总号

签字  
 日期

|   |               |                           |                           |      |      |            |                 |          |                    |    |    |                |  |
|---|---------------|---------------------------|---------------------------|------|------|------------|-----------------|----------|--------------------|----|----|----------------|--|
| A | 芯数<br>Pin (n) | PART NO.                  | 尺寸 Size                   |      |      |            |                 | PART No. | GENERAL TOLERANCES |    |    | DRAWN BY       | 新富尔电子有限公司<br>XINFUER ELECTORN CO.,LTD                  |
|   | 4-9           |                           | 600**040**-*—600**090**-* | 24.0 | 11.5 | ---        | 24              | 32       | 44                 | 56 | 72 | 0.X $\pm 0.25$ |  |
|   | 10-14         | 600**100**-*—600**140**-* | 32.0                      | 14.2 | 28.4 | REEL WIDTH | 1000 pcs/Reel   |          |                    |    |    | CHK. BY        | SHEET  |
|   | 15-26         | 600**150**-*—600**260**-* | 44.0                      | 20.2 | 40.4 | PCS/REEL   | 12 9 7 5 4      |          |                    |    |    | 崔华文/2017.06.21 |  |
|   | 27-36         | 600**270**-*—600**360**-* | 56.0                      | 26.2 | 52.4 | REEL/BOX   | 12K 9K 7K 5K 4K |          |                    |    |    | APRV. BY       | PART NO.   |
|   | 37-40         | 600**370**-*—600**400**-* | 72.0                      | 34.2 | 68.4 | BOX/PCS    | 360*360*350     |          |                    |    |    | 洪新江/2017.06.21 | 60054/60055/60056                                      |
|   |               |                           |                           |      |      | CTN. SIZE  |                 |          |                    |    |    | DRAWING NO.    | TITLE  |
|   |               |                           |                           |      |      |            |                 |          |                    |    |    | 004-0054-001   | 1.0 FPC CONN. ZIF SMT FRONTFLIP H=5.5 VERTICAL CONTACT |