
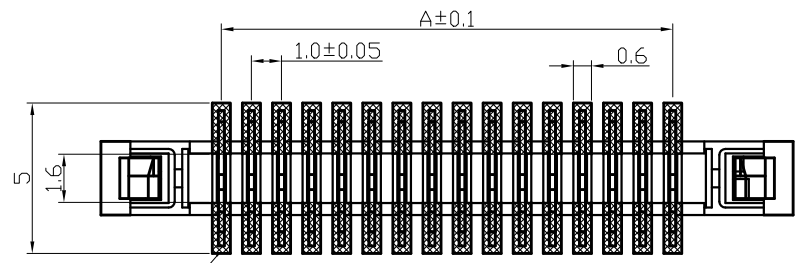

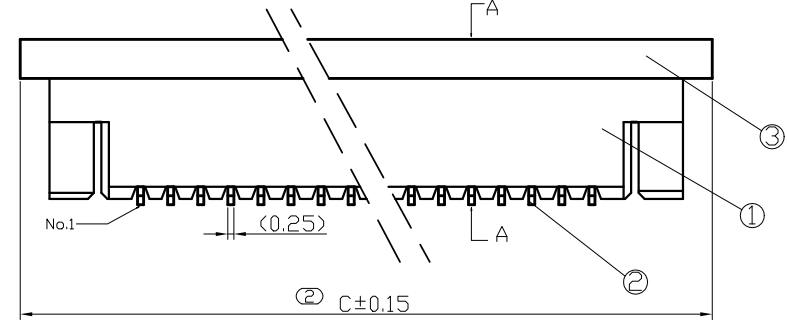




0 9 8 7 6 5 4 3 2 1

REV.	DESCRIPTION	DATE
B/0	升B版	2017.01.07

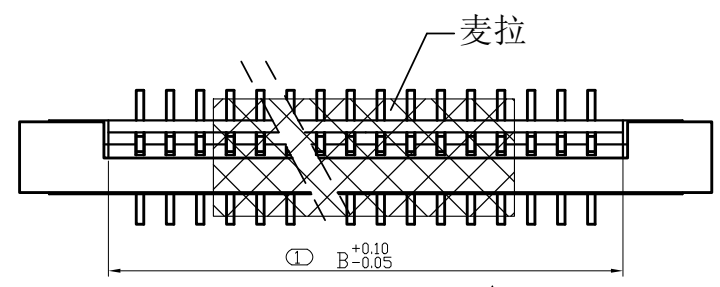


适用线路板
RECOMMENDED PCB LAYOUT

CKT	Dim A	Dim B	Dim C	CKT	Dim A	Dim B	Dim C
4	3	5.06	11	23	22	24.06	30
5	4	6.06	12	24	23	25.06	31
6	5	7.06	13	25	24	26.06	32
7	6	8.06	14	26	25	27.06	33
8	7	9.06	15	27	26	28.06	34
9	8	10.06	16	28	27	29.06	35
10	9	11.06	17	29	28	30.06	36
11	10	12.06	18	30	29	31.06	37
12	11	13.06	19	31	30	32.06	38
13	12	14.06	20	32	31	33.06	39
14	13	15.06	21	33	32	34.06	40
15	14	16.06	22	34	33	35.06	41
16	15	17.06	23	35	34	36.06	42
17	16	18.06	24	36	35	37.06	43
18	17	19.06	25	37	36	38.06	44
19	18	20.06	26	38	37	39.06	45
20	19	21.06	27	39	38	40.06	46
21	20	22.06	28	40	39	41.06	47
22	21	23.06	29				

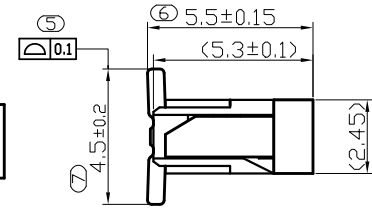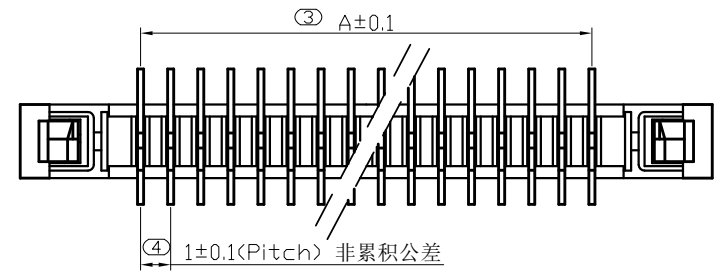

NOTES:
 1. MATERIAL SEE TABLE;
 2. PLATING SEE TABLE;
 3. RATING
 3-1. OPERATING TEMPERATURE: -25~85°C
 3-2. OPERATING VOLTAGE: 125V AC/DC
 3-3. CURRENT RATING: 1.0 AMPS
 3-4. DIELECTRIC WITHSTANDING VOLTAGE:
 500V AC/Minute;
 3-5. INSULATION RESISTANCE: 500MΩ Min;
 3-6. CONTACT RESISTANCE: 0.03Ω Max;
 4. PART NO.
 60056-**-01-5001
 SERIES Lead Free & HF
 5=Halogen-Free
 CIRCUIT NO. Plating:
 04-40 1=BRIGHT-TIN
 Packing Option: 80 μ" Min OVER Ni
 0=Reel Packing 30 μ" Min..
 1=Tube Packing

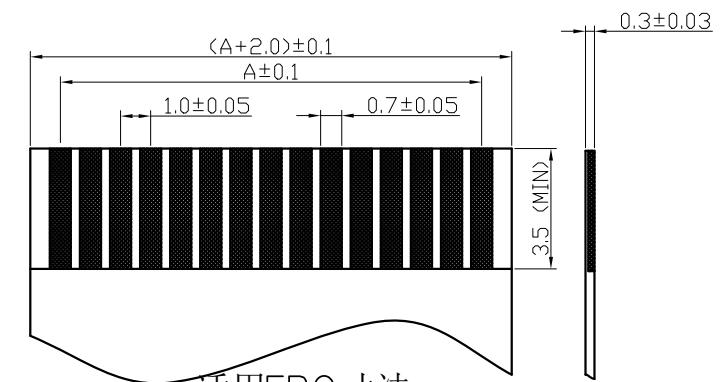

适用FPC寸法
APPLICABLE FPC

3	142-0052-001	Actuator	LCP(UL94V-0)	1	壳
2	112-0056-001	Contact	磷 Phosphor Bronze*1		接触材料磷30u"MIN, 磷80u"MIN.
1	132-0052-001	Housing	LCP(UL94V-0)	1	壳

GENERAL TOLERANCES			DRAWN BY	赵婷婷/2017.01.07	新富尔电子有限公司 XINFUER ELECTORN CO.,LTD
0.X	±0.25	X.* ±3°	CHK. BY	崔华文/2017.01.07	
0.XX	±0.12		APRV. BY	洪新江/2017.01.07	
0.XXX	±0.05	X.X* ±0.5°	DRAWING NO.	1 OF 1	SHEET
UNIT	SIZE	SCALE	006-0056-003	PROD. NAME	1.0D-nPB-AL
MM	A4	1:1		PART NO.	60056-**-01-5001
TITLE					
1.0 FPC CONN. ZIF SMT FRONTFLIP H=5.5 VERTICAL CONTACT					

借用登记

旧底图总号

底图总号

签字

日期

0 9 8 7 6 5 4 3 2 1