
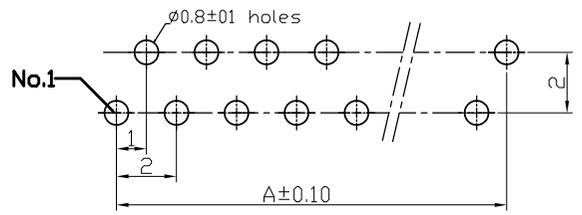
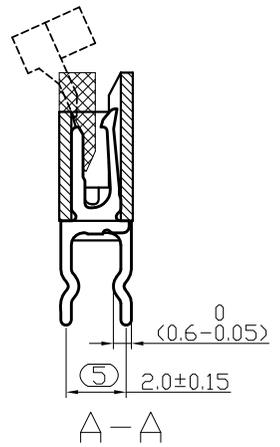


REV.	DESCRIPTION	DATE
B/0	升 B 版	2017.01.07

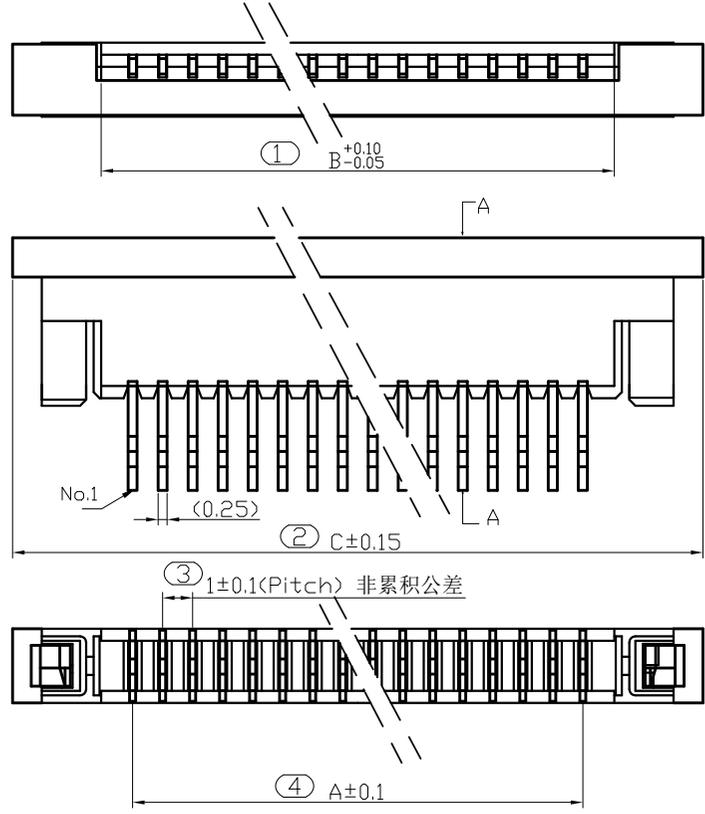


适用线路板
RECOMMENDED PCB LAYOUT

CKT	Dim A	Dim B	Dim C	CKT	Dim A	Dim B	Dim C
4	3	5.06	11	23	22	24.06	30
5	4	6.06	12	24	23	25.06	31
6	5	7.06	13	25	24	26.06	32
7	6	8.06	14	26	25	27.06	33
8	7	9.06	15	27	26	28.06	34
9	8	10.06	16	28	27	29.06	35
10	9	11.06	17	29	28	30.06	36
11	10	12.06	18	30	29	31.06	37
12	11	13.06	19	31	30	32.06	38
13	12	14.06	20	32	31	33.06	39
14	13	15.06	21	33	32	34.06	40
15	14	16.06	22	34	33	35.06	41
16	15	17.06	23	35	34	36.06	42
17	16	18.06	24	36	35	37.06	43
18	17	19.06	25	37	36	38.06	44
19	18	20.06	26	38	37	39.06	45
20	19	21.06	27	39	38	40.06	46
21	20	22.06	28	40	39	41.06	47
22	21	23.06	29				

NOTES:
 1. MATERIAL SEE TABLE;
 2. PLATING SEE TABLE;
 3. RATING
 3-1. OPERATING TEMPERATURE: $-25 \sim 85^{\circ}\text{C}$
 3-2. OPERATING VOLTAGE: 50V AC/DC
 3-3. CURRENT RATING: 1.0 AMPS
 3-4. DIELECTRIC WITHSTANDING VOLTAGE:
 500V AC/Minute;
 3-5. INSULATION RESISTANCE: $500\text{M}\Omega$ Min;
 3-6. CONTACT RESISTANCE: 0.03Ω Max;
 4. PART NO.
 60057-**-11-1001
 SERIES Lead Free & HF
 1=Lead Free
 CIRCUIT NO. Plating:
 04-40 1=BRIGHT-TIN
 Packing Option: 80 μ " Min OVER Ni
 1=Tube Packing 30 μ " Min..

序号	图号	名称	材料	数量	附注
3	142-0057-002	驱动 Actuator	LCP(UL94V-0)	1	黑色
2	112-0057-001	端子 Contact	磷青铜 Phosphor Bronze	n x 1	电镀: 整个表面镀镍 30μ " MIN, 再镀 80μ " MIN.
1	132-0057-001	基板 Housing	PA46(UL94V-0)	1	本色

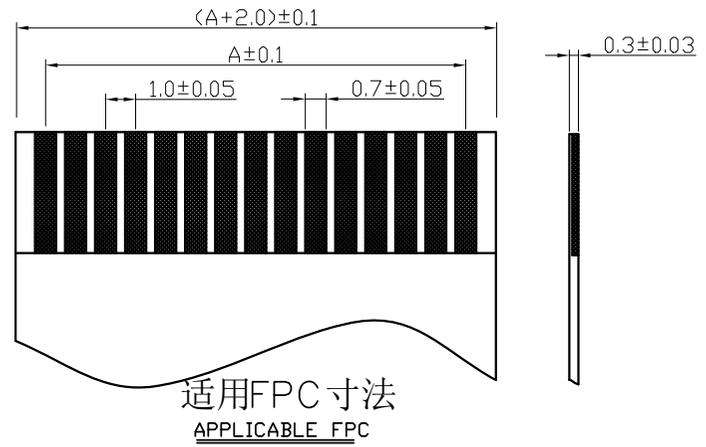

GENERAL TOLERANCES			DRAWN BY	新富尔电子有限公司	
0.X	± 0.25	$X^{\circ} \pm 3^{\circ}$	赵博博/2017.01.07	XINFUER ELECTORN CO.,LTD	
0.XX	± 0.12		崔华文/2017.01.07	SHEET	
0.XXX	± 0.05	$X.X^{\circ} \pm 0.5^{\circ}$	洪新江/2017.01.07	1 OF 1	PROD. NAME 1.0E-nPL
UNIT	SIZE	SCALE	DRAWING NO.	PART NO. 60057-**-1001	
MM	A4	1:1	006-0057-001	TITLE	
1.0 FPC CONN. ZIF SMT FRONTFLIP H=5.6 VERTICAL CONTACT					

借用登记

旧底图总号

底图总号

签字

日期