
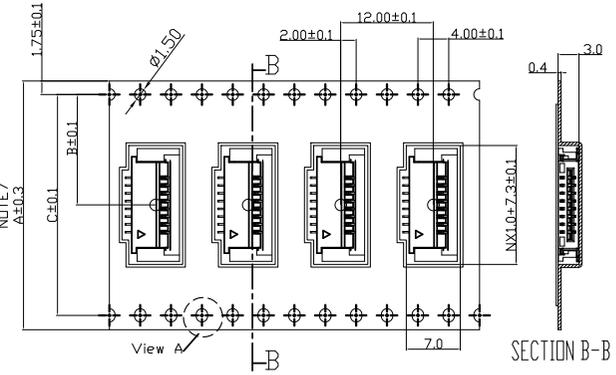
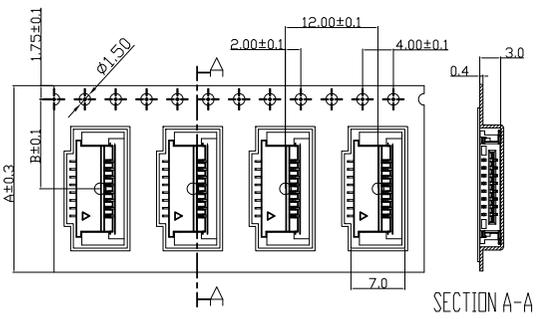
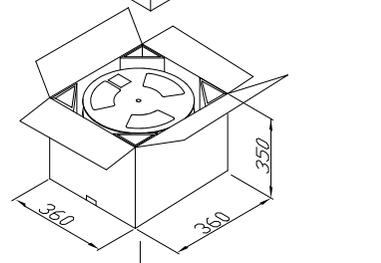
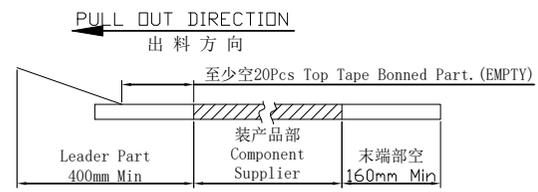
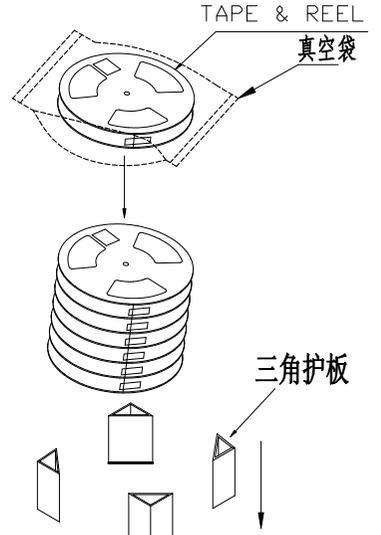
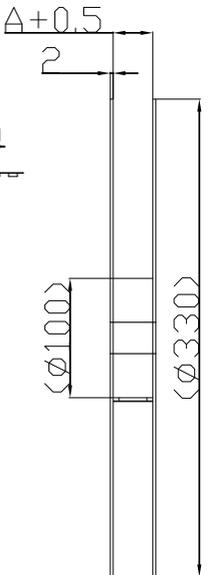


REV.	DESCRIPTION	DATE
B/0	升B版	2017.06.20

Note:  
 1.Sprocket holes pitch cumulative tolerance  $\pm 0.1$ . (Accumulative Pitch  $\pm 0.2$ )  
 2.Carrier camber is within 1mm in 100mm.  
 3.All dimensions meet EIA-481-D requirements.  
 4.Thick ness:  $0.4 \pm 0.1$ mm.  
 5.Material of top fape: PET, PE, PEF  
 6.Material of carrier fape: Poystyrene  
 7.For tape width (dimension A) 16mm and 24mm a pilot hole is provided on one side. For tape width (dimension A) 32mm and 44mm pilot holes are provided on both sides.

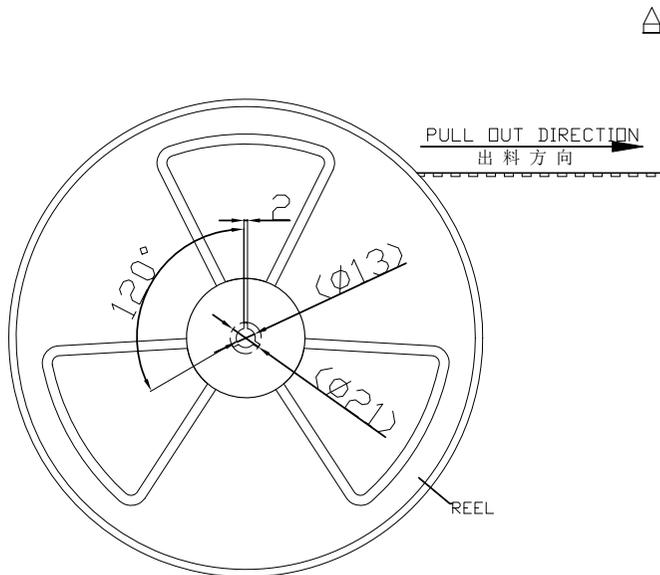

载带带头及带尾尺寸  
 Lead tape length

载带上下带剥离强度: 0.1N~1.3N (10g~130g)  
 Peeling off force of top tape:  
 0.1N~1.3N (10g~130g)

宽度: 16mm/24mm 载带

宽度: 32mm及以上 载带

ROHS管理规定:  
 1、禁止使用含有ROHS指令所限制的物质。  
 2、对应的SGS或ITS出具的ICP-AES数据、不可测定物质的成分表,有效期一年。

借用登记  
 旧底图总号  
 底图总号  
 签字  
 日期

芯数 Pin (n)	PART NO.	尺寸 Size		
		A	B	C
4-8	60063-040*-****-60063-080*-****	24.0	11.5	—
10	60063-100*-****	32.0	14.2	28.4
20	60063-200*-****	44.0	20.2	40.4
30	60063-300*-****	56.0	26.2	52.4

PART No.	60063-**0*-****			
REEL WIDTH	24	32	44	56
PCS/REEL	2000		1500	
REEL/BOX	12	9	7	5
BOX/PCS	24K	18K	10.5K	7.5K
CTN. SIZE	360*360*350			

GENERAL TOLERANCES			DRAWN BY	赵博博/2017.06.20
0.X	$\pm 0.25$	X. $^{\circ}$	$\pm 3^{\circ}$	CHK. BY
0.XX	$\pm 0.12$			崔华文/2017.06.20
0.XXX	$\pm 0.05$	X.X $^{\circ}$	$\pm 0.5^{\circ}$	APRV. BY
				洪新江/2017.06.20
UNIT	SIZE	SCALE	DRAWING NO.	
MM	A4	1:1	004-0063-001	

**ZJXF E** 新富尔电子有限公司  
 XINFUER ELECTORN CO.,LTD

SHEET 1 OF 1  
 PROD. NAME 1.0F-nPBX  
 PART NO. 60063-\*\*0\*-\*\*\*\*

TITLE  
 1.0 FPC CONN. ZIF SMT BACKFLIP H=2.6 DOUBLE LOWER CONTACT