
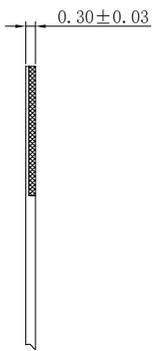
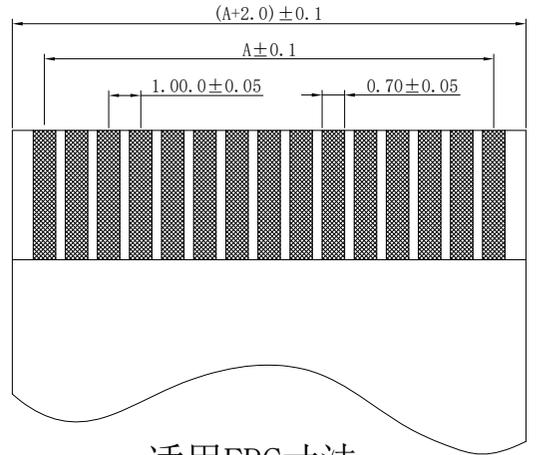
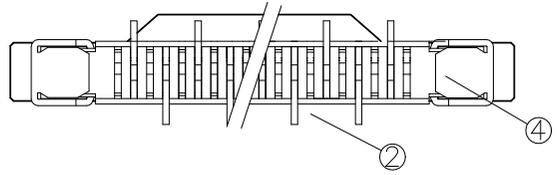

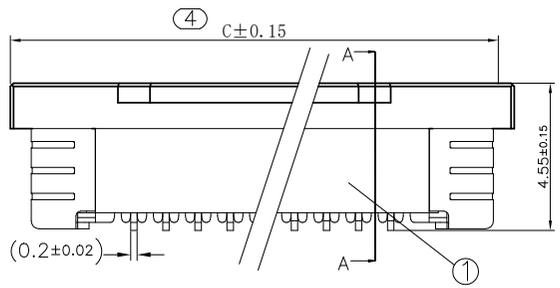
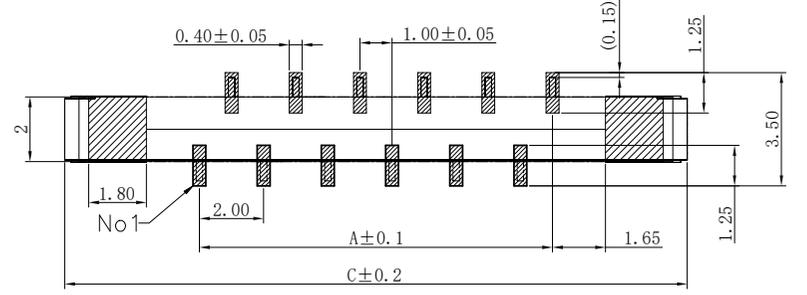



REV.	DESCRIPTION	DATE
B/0	升 B 版	2016.12.28

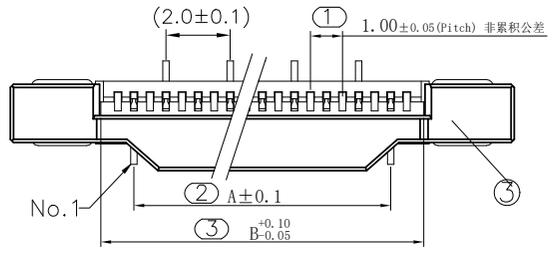

适用线路板
RECOMMENDED PCB LAYOUT

- NOTES:
- MATERIAL SEE TABLE;
 - PLATING SEE TABLE;
 - RATING
 - 3-1. OPERATING TEMPERATURE: -25~85°C
 - 3-2. OPERATING VOLTAGE: 50V AC/DC
 - 3-3. CURRENT RATING: 1.0 AMPS
 - 3-4. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC/Minute;
 - 3-5. INSULATION RESISTANCE: 500MΩ Min;
 - 3-6. CONTACT RESISTANCE: 0.03Ω Max;
 - PART NO.
- 60068-**01-5001
- SERIES: 5=Halogen-Free, Lead Free & HF
- CIRCUIT NO.: 05-29
- Packing Option: 0=Reel Packing
- Plating: 1=BRIGHT-TIN, 80μ"Min OVER Ni, 30μ"Min..

CKT	Dim A				Dim B				Dim C			
	16	15	17.06	22.7	17	16	18.06	23.7	22	21	23.06	28.7
6	5	7.06	12.7									
7	6	8.06	13.7									
10	9	11.06	16.7									
11	10	12.06	17.7									
12	11	13.06	18.7									
13	12	14.06	19.7									
14	13	15.06	20.7									

4	122-0001-001	弹片 Fitting Nail	磷青铜 Phosphor Bronze	2	电镀(镍): 整个表面电镀30u"MIN, 焊盘镀 80u"MIN.
3	142-0021-001	铆 Actuator	LCPLUL94V-0	1	黑色
2	112-0022-001	端子 Contact	磷青铜 Phosphor Bronze	n×1	电镀(镍): 整个表面电镀30u"MIN, 焊盘镀 80u"MIN.
1	132-0021-001	基座 Housing	LCPLUL94V-0	1	本色
序号	图号	名称	材料	数量	备注

GENERAL TOLERANCES			DRAWN BY	新富尔电子有限公司	
0.X	±0.25	X.* ±3°	赵博博/2016.12.28	XINFUER ELECTORN CO.,LTD	
0.XX	±0.12		崔华文/2016.12.28		
0.XXX	±0.05	X.X* ±0.5°	洪新江/2016.12.28		
UNIT	SIZE	SCALE	DRAWING NO.	SHEET	PROD. NAME
MM	A4	1:1	006-0068-001	1 OF 1	1.0-08-nPLB(4孔以上)
			TITLE	PART NO.	
			1.0 FPC CONN. ZIF SMT DRAWER H=2.65 VERTICAL CONTACT		

适用FPC寸法
APPLICABLE FPC

借用登记

旧底图总号

底图总号

签字

日期