





REV.	DESCRIPTION	DATE
B/0	升 B 版	2016.12.27

NOTES:
 1. MATERIAL SEE TABLE;
 2. PLATING SEE TABLE;
 3. RATING
 3-1. OPERATING TEMPERATURE: -25~85°C
 3-2. OPERATING VOLTAGE: 50V AC/DC
 3-3. CURRENT RATING: 0.5 AMPS
 3-4. DIELECTRIC WITHSTANDING VOLTAGE:
 500V AC/Minute;
 3-5. INSULATION RESISTANCE: 500M Ω Min;
 3-6. CONTACT RESISTANCE: 0.03 Ω Max;
 4. PART NO.
 60081-**-11-5014



SERIES: Lead Free & HF
 5=Halogen-Free

CIRCUIT NO.: Plating:
 1=BRIGHT-TIN 80 μ Min
 OVER Ni 30 μ Min..

Packing Option:
 1=Tube Packing

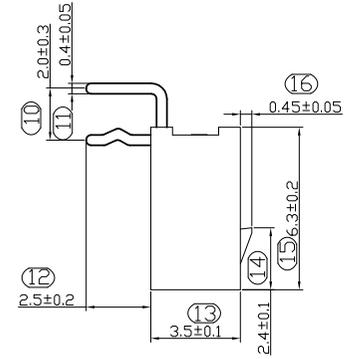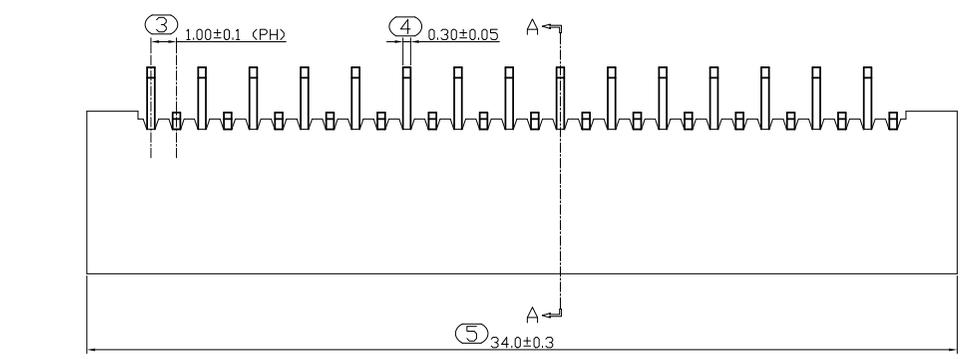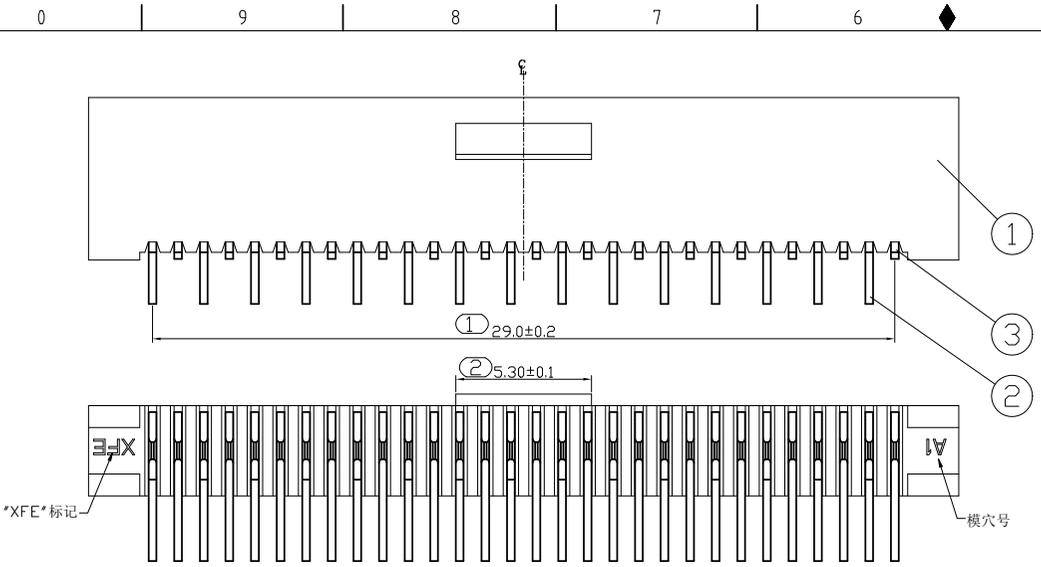

SECTION A-A

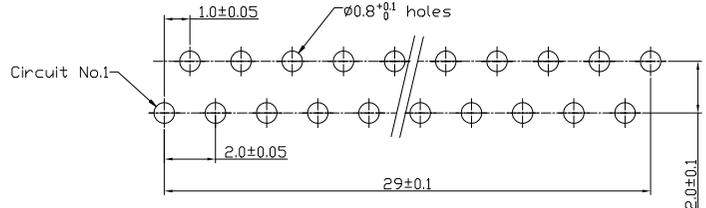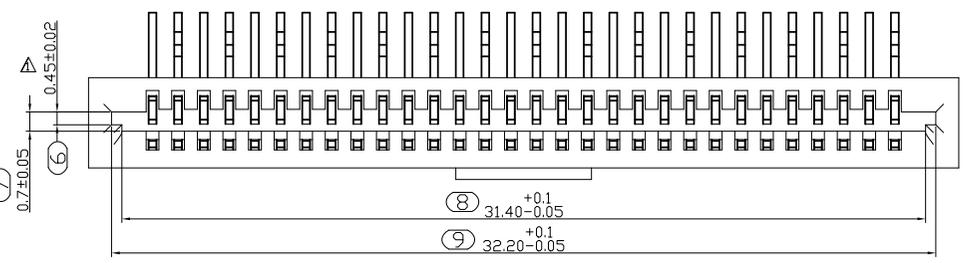

适用线路板
 RECOMMENDED PCB LAYOUT

序号	图号	名称	材料	数量	附注
3	212-0081-002	B端子 B Contact	磷青铜 Phosphor Bronze	n x 1/2	电镀(镀): 整个表面镀底镍30 μ MIN,再镀亮锡80 μ MIN.
2	212-0081-001	A端子 A Contact	磷青铜 Phosphor Bronze	n x 1/2	电镀(镀): 整个表面镀底镍30 μ MIN,再镀亮锡80 μ MIN.
1	232-0081-001	基座 Housing	LCP (UL94V-0)	1	黑色 Black

GENERAL TOLERANCES		DRAWN BY	新富尔电子有限公司 XINFUER ELECTORN CO.,LTD		
0.X	±0.25	赵博博/2016.12.27	SHEET 1 OF 1 PART NO. 60081-3011-5014		
0.XX	±0.12	崔华文/2016.12.27			
0.XXX	±0.05	洪新江/2016.12.27			
UNIT	SIZE	SCALE	DRAWING NO.	TITLE	
MM	A4	1:1	006-0081-001	1.0 FPC CONN. NON ZIF DIP FRONTFLIP H=3.5 CONTACT	

借用登记

旧底图总号

底图总号

签字

日期