





0 9 8 7 6 5 4 3 2 1

REV.	DESCRIPTION	DATE
B/0	升 B 版	2017.01.20

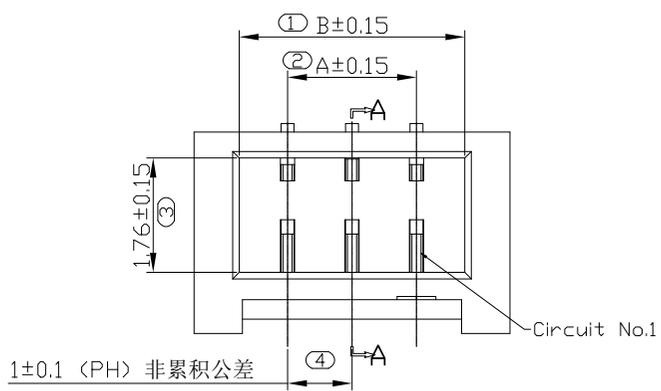


- NOTES:
1. MATERIAL SEE TABLE;
 2. PLATING SEE TABLE;
 3. RATING
 - 3-1. OPERATING TEMPERATURE: -25~85°C
 - 3-2. OPERATING VOLTAGE: 150V AC/DC
 - 3-3. CURRENT RATING: 1.0 AMPS
 - 3-4. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC/Minute;
 - 3-5. INSULATION RESISTANCE: 100MΩ Min;
 - 3-6. CONTACT RESISTANCE: 0.03Ω Max;

4. PART NO. 61012-xx02-6001
SERIES
CIRCUIT NO.
Packing Option: 0=Reel Packing 1=Tube Packing
Lead Free & HF 6=Halogen-Free
Plating: 2=MATTE-TIN 80μ"Min OVER Ni 30μ"Min..

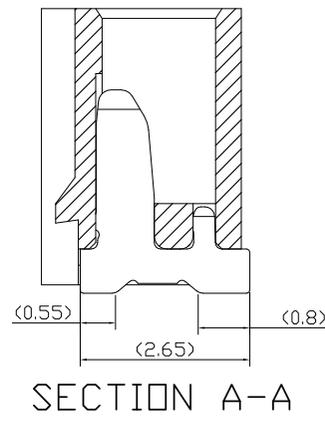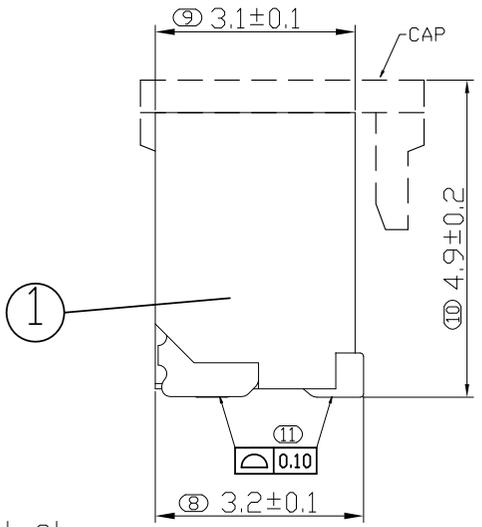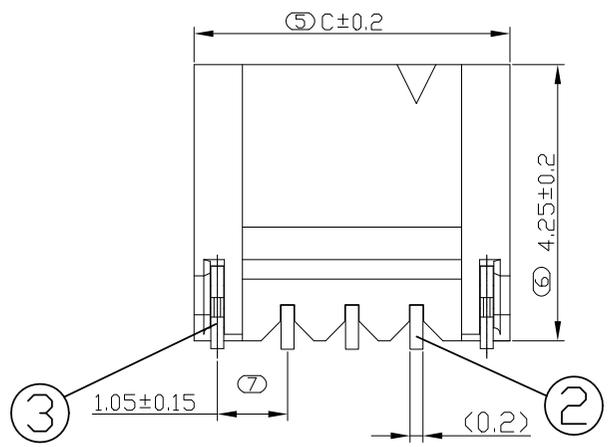

CKT	Dim A	Dim B	Dim C
2	1.0	2.5	3.9
3	2.0	3.5	4.9
4	3.0	4.5	5.9
5	4.0	5.5	6.9
6	5.0	6.5	7.9
7	6.0	7.5	8.9
8	7.0	8.5	9.9
9	8.0	9.5	10.9
10	9.0	10.5	11.9
11	10.0	11.5	12.9
12	11.0	12.5	13.9
13	12.0	13.5	14.9
14	13.0	14.5	15.9
15	14.0	15.5	16.9
16	15.0	16.5	17.9
17	16.0	17.5	18.9
18	17.0	18.5	19.9
19	18.0	19.5	20.9
20	19.0	20.5	21.9

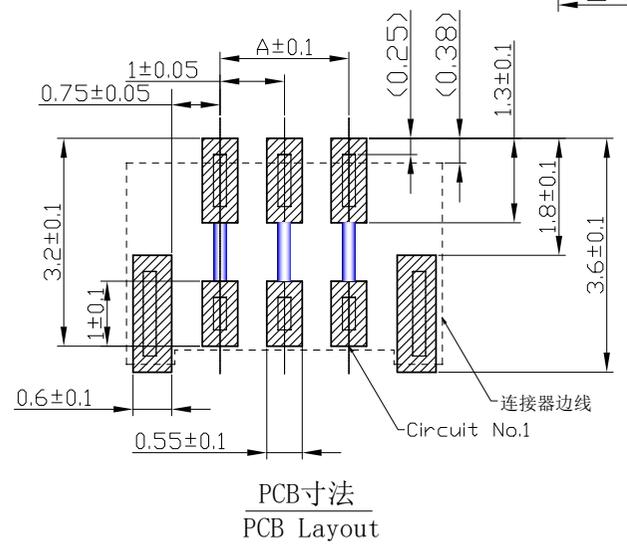

序号	图号	名称	材料	数量	附注
4	172-1012-001	盖子	LCP(UL94V-0)	1	本色
3	122-1012-001	焊片 Fitting Nail	磷青铜Phosphor Bronze	2	电镀: 整个表面镀底镍30u"MIN,再镀锡 80u"MIN..
2	112-1012-001	端子 Contact	磷青铜Phosphor Bronze	nx1	电镀: 整个表面镀底镍30u"MIN,再镀锡 80u"MIN..
1	132-1012-001	基座 Wafer	LCP (UL94V-0)	1	本色

GENERAL TOLERANCES		DRAWN BY 赵博博/2017.01.20	新富尔电子有限公司 XINFUER ELECTORN CO.,LTD
0.X ±0.25	X.° ±3°	CHK. BY 崔华文/2017.01.20	
0.XX ±0.12		APRV. BY 洪新江/2017.01.20	
0.XXX ±0.05	X.X° ±0.5°	DRAWING NO. 006-1012-003	SHEET 1 OF 1 PROD. NAME 1.0TB-nAB-DK1-LCP PART NO. 61012-**02-6001 TITLE 1.0 WTB CONN. SMT SINGLE ROW VERTICAL

借用登记
旧底图总号
底图总号
签字
日期

0 9 8 7 6 5 4 3 2 1