

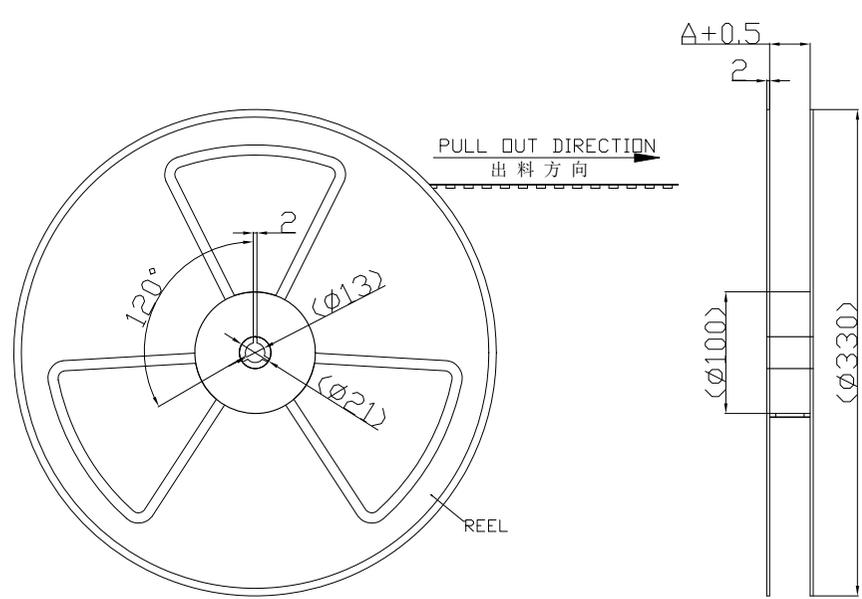


REV.	DESCRIPTION	DATE
B/0	升B版	2017.01.20

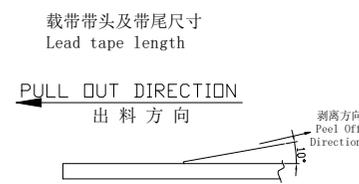



Note:

- 1.Sprocket holes pitch cumulative tolerance ± 0.1 . (Accumulative Pitch ± 0.2)
- 2.Carrier camber is within 1mm in 100mm.
- 3.Number of connectors: 1000 Pcs/REEL
- 4.All dimensions meet EIA-481-D requirements.
- 5.Thick ness: 0.4 ± 0.1 mm.
- 6.Material of top fape: PET, PE, PEF
- 7.Material of carrier fape: Poystyrene
- 8.For tape width (dimension A) 16mm and 24mm a pilot hole is provided on one side. For tape width (dimension A) 32mm and 44mm pilot holes are provided on both sides.

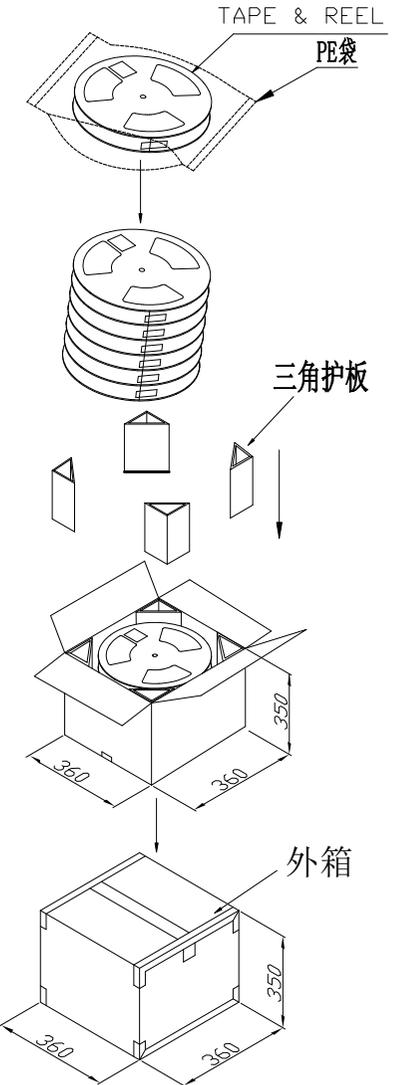

载带上下带剥离强度: 0.1N--1.3N(10g-130g)
Peeling off force of top tape: 0.1N--1.3N(10g-130g)

ROHS管理规定:
1、禁止使用含有ROHS指令所限制的物质。
2、对应的SGS或ITS出具的ICP-AES数据、不可测定物质的成分表,有效期一年。

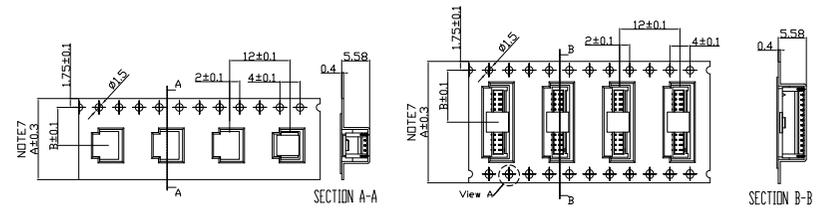

借用登记
旧底图总号
底图总号

签字
日期

PART No.	61012-**(0)*-****		
REEL WIDTH	16	24	32
PCS/REEL	1000		
REEL/BOX	16	12	9
BOX/PCS	16K	12K	9K
CTN. SIZE	360*360*350		

GENERAL TOLERANCES			DRAWN BY	赵博博/2017.01.20	
0.X	± 0.25	X. $^{\circ}$	$\pm 3^{\circ}$	CHK. BY	崔华文/2017.01.20
0.XX	± 0.12			APRV. BY	洪新江/2017.01.20
0.XXX	± 0.05	X.X. $^{\circ}$	$\pm 0.5^{\circ}$	DRAWING NO.	004-1012-001
UNIT	SIZE	SCALE			
MM	A4	1:1			

ZJXF E 新富尔电子有限公司
XINFUER ELECTORN CO.,LTD

SHEET 1 OF 1
PROD. NAME 1.0TB-nAB-DK1/DK2
PART NO. 61012-**(0)*-****

TITLE
1.0 WTB CONN. SMT SINGLE ROW RIGHT-ANGLE

芯数 Pin (n)	PART NO.	尺寸 Size		
		A	B	C
2-6	61012-020*-****---61012-060*-****	16.0	7.5	---
7-10	61012-070*-****---61012-100*-****	24.0	11.5	---
14	61012-140*-****	32.0	14.2	28.4