




0 9 8 7 6 5 4 3 2 1





REV.	DESCRIPTION	DATE
A/0	新版发行	2017.03.20

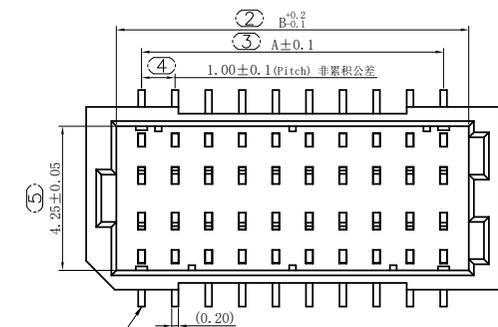

剖面 A-A

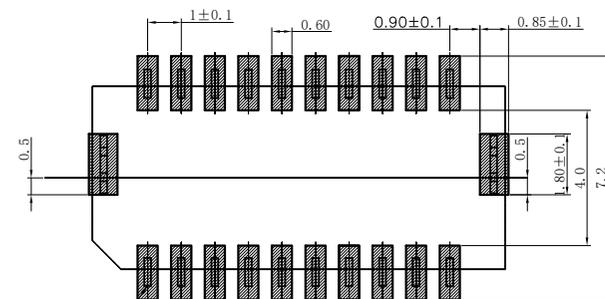

PCB 寸法  
PCB Layout

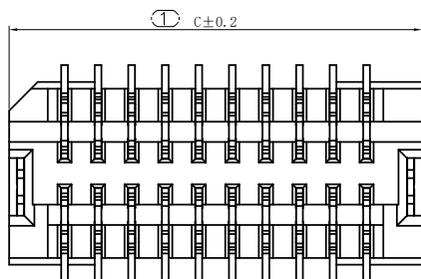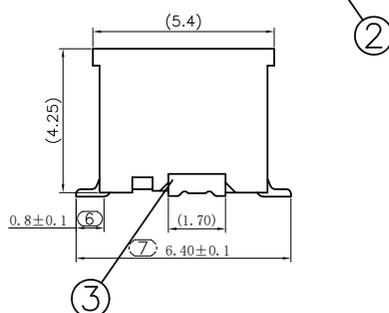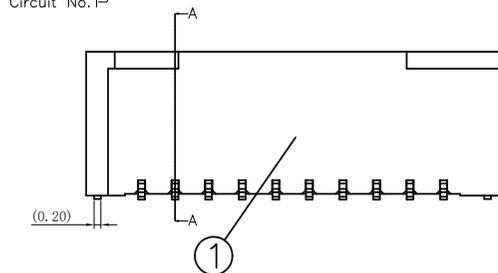

NOTES:

- MATERIAL SEE TABLE;
- PLATING SEE TABLE;
- RATING
- 3-1. OPERATING TEMPERATURE:-25~85°C
- 3-2. OPERATING VOLTAGE: 50V AC/DC
- 3-3. CURRENT RATING: 1AMPS(28#)
- 3-4. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC/Minute;
- 3-5. INSULATION RESISTANCE:100MΩ Min;
- 3-6. CONTACT RESISTANCE:0.03Ω Max;

4. PART NO.

61015-\*\*-03-1001

SERIES      Lead Free & HF  
                 1=Lead Free

CIRCUIT NO

Packing Option:  
0=Reel Packing  
1=Tube Packing

Plating:  
3=Gold Flash  
OVER Ni 30μ"Min..

孔位 poles	A	B	C
12	5	6.5	8.3
14	6	7.5	9.3
16	7	8.5	10.3
20	9	10.5	12.3
22	10	11.5	13.3
30	14	15.5	17.3
40	19	20.5	22.3
50	24	25.5	27.3



借用登记

旧底图总号

底图总号

签字

日期

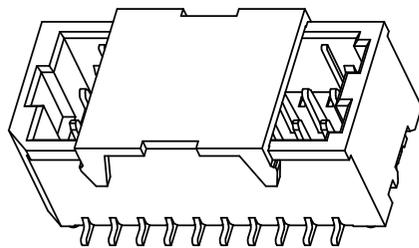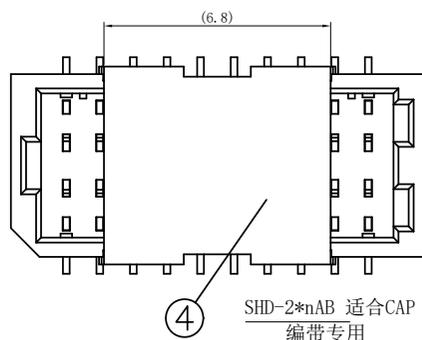

4	152-1015-001	盖子 CAP	PA9T(UL94V-0)	1	本色
3	122-1015-001	焊片 Fitting Nail	磷青铜 Phosphor Bronze	2	电镀: 整个表面镀底镍30u"MIN, 再镀金 Gold Flash.
2	112-1015-001	端子 Contact	磷青铜 Phosphor Bronze	n×1	电镀: 整个表面镀底镍30u"MIN, 再镀金 Gold Flash.
1	132-1015-001	基板 Wafer	PA9T(UL94V-0)	1	本色
序号	图号	名称	材料	数量	附注

GENERAL TOLERANCES		DRAWN BY	赵博群/2017.03.20		
0.X	±0.25	X.*	±3*	CHK. BY	崔华文/2017.03.20
0.XX	±0.12			APRV. BY	洪新江/2017.03.20
0.XXX	±0.05	X.X*	±0.5*	SHEET	1 OF 1
UNIT	MM	SIZE	A4	SCALE	1:1
DRAWING NO.		006-1015-001			
PART NO.		61015-**-03-1001			
TITLE 1.0 WTB CONN. SMT SINGLE ROW VERTICAL					

**ZJ XFE** 新富尔电子有限公司  
XINFUER ELECTORN CO.,LTD

PROD. NAME SHD-2\*nAB

0 9 8 7 6 5 4 3 2 1