

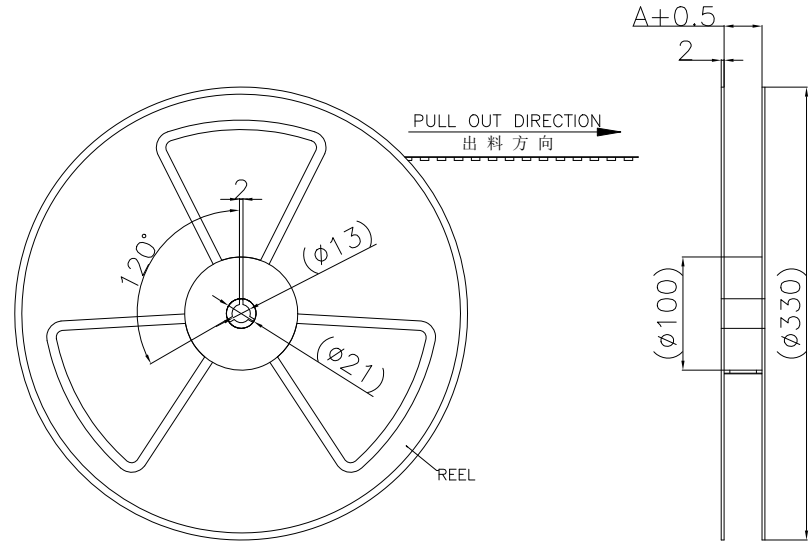


REV.	DESCRIPTION	DATE
B/0	升 B 版	2016.12.23

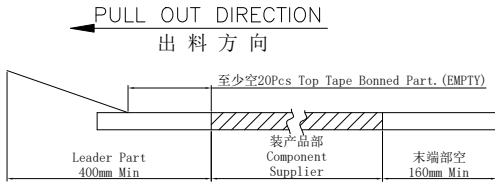


- Note:
- 1.Sprocket holes pitch cumulative tolerance ± 0.1 . (Accumulative Pitch ± 0.2)
 - 2.Carrier camber is within 1mm in 100mm.
 - 3.All dimensions meet EIA-481-D requirements.
 - 4.Thick ness: 0.4 ± 0.05 mm.
 - 5.Material of top fape: PET, PE, PEF
 - 6.Material of carrier fape: Poystyrene
 - 7.For tape width (dimension A) 16mm and 24mm a pilot hole is provided on one side. For tape width (dimension A) 32mm and 44mm pilot holes are provided on both sides.

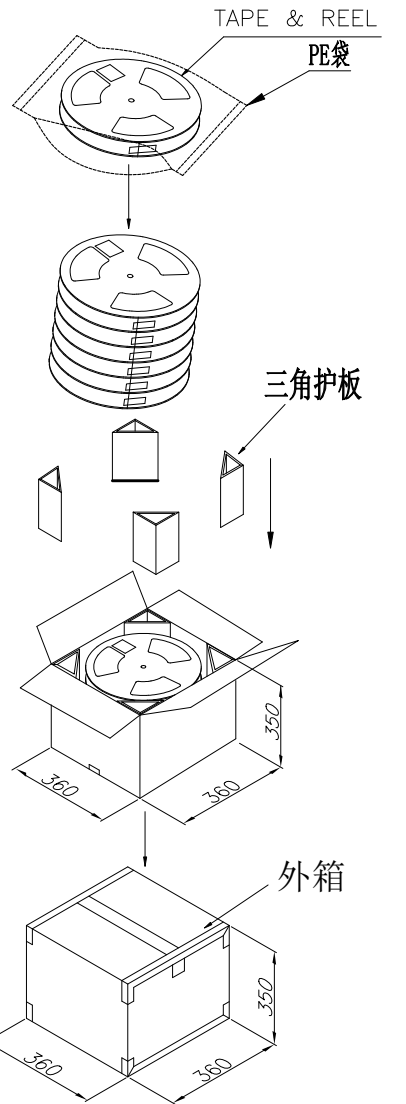

载带带头及带尾尺寸
Lead tape length



载带上下带剥离强度: 0.1N--1.3N (10g-130g)
Peeling off force of top tape:
0.1N--1.3N (10g-130g)

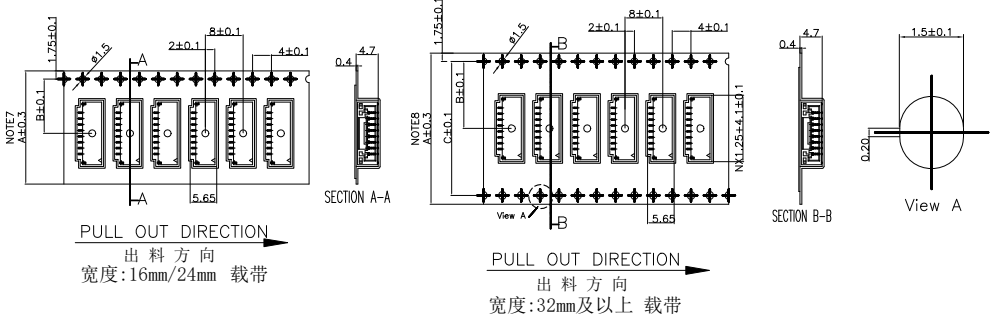

借用登记
旧底图总号
底图总号
签字
日期

PART No.	61021-**-0*-****			
REEL WIDTH	16	24	32	44
PCS/REEL	1500			
REEL/BOX	16	12	9	7
BOX/PCS	24K	18K	13.5K	10.5K
CTN. SIZE	360*350*350			

GENERAL TOLERANCES			DRAWN BY	赵博博/2016.12.23	
0.X	± 0.25	X. $^{\circ}$	$\pm 3^{\circ}$	CHK. BY	崔华文/2016.12.23
0.XX	± 0.12			APRV. BY	洪新江/2016.12.23
0.XXX	± 0.05	X.X $^{\circ}$	$\pm 0.5^{\circ}$	DRAWING NO.	004-1021-001
UNIT	MM	SIZE	A4	SCALE	1:1

ZJ XFE 新富尔电子有限公司
XINFUER ELECTORN CO.,LTD

SHEET 1 OF 1
PROD. NAME CH-nAWB
PART NO. 61021-**-0*-****

TITLE
1.25 WTB CONN. SMT SINGLE ROW RIGHT-ANGLE

芯数 Pin (n)	PART NO.	尺寸 Size		
		A	B	C
2-3	61021-020*-****-61021-030*-****	16.0	7.5	---
4-9	61021-040*-****-61021-090*-****	24.0	11.5	---
10(TCL/双)	61021-100*-1011/61021-100*-5017	24.0	11.5	---
10-13	61021-100*-****-61021-130*-****	32.0	14.2	28.4
14-20	61021-140*-****-61021-200*-****	44.0	20.2	40.4