REV.	DESCRIPTION	DATE
B/0	升 B 版	2017.02.14

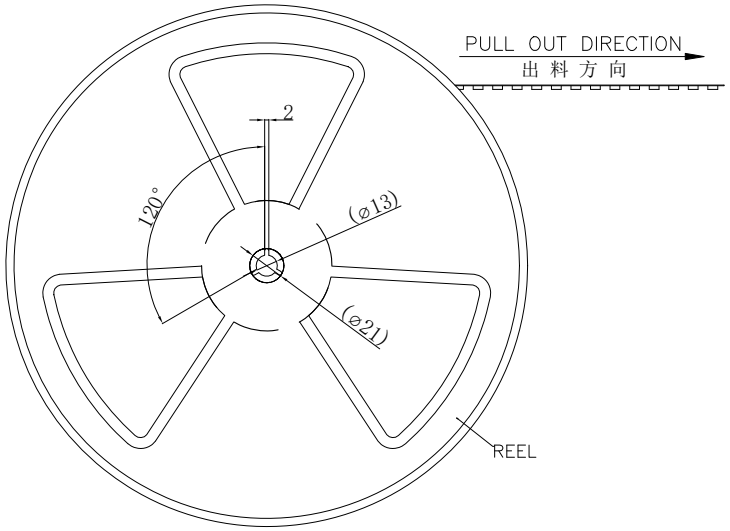

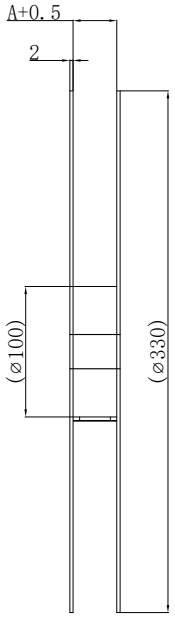

Note:
1. Sprocket holes pitch cumulative tolerance ±0.1.(Accumulative Pitch ±0.2)
2. Carrier camber is within 1mm in 100mm.
3. All dimensions meet EIA-481-D requirements.
4. Thick ness:0.4±0.1mm.
5. Material of top fape:PET,PE.PEF
6. Material of carrier fape:Poystyrene
7. For tape width (dimension A) 16mm and 24mm a pilot hole is provided on one side. For tape width (dimension A)32mm and 44mm pilot holes are provided on both sides.

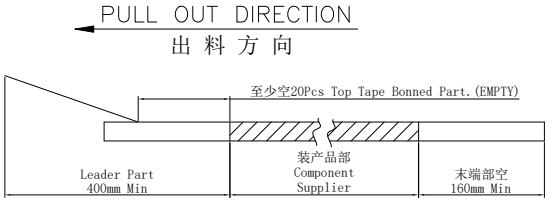

载带带头及带尾尺寸
Lead tape length

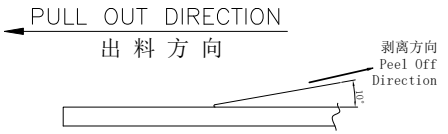

载带上下带剥离强度：0.1N--1.3N(10g-130g)
Peeling off force of top tape:
0.1N--1.3N(10g-130g)

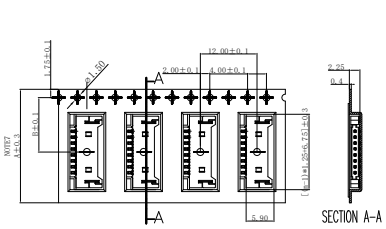

宽度:16mm/24mm 载带

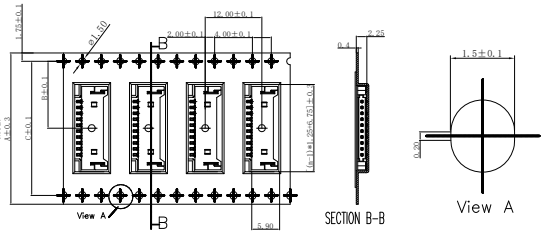

宽度:32mm及以上 载带

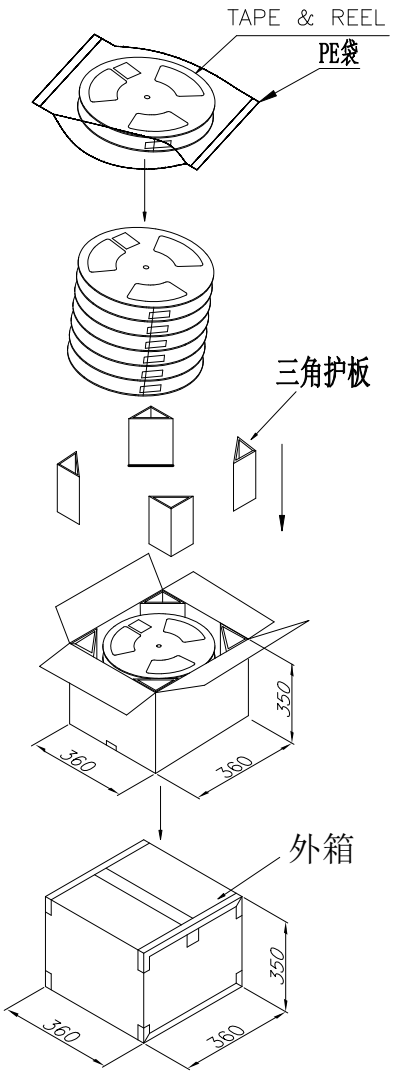

芯数 Pin (n)	PART NO.	尺寸 Size A	B	C
2-7	61025-020*-****----61025-070*-****	24.0	11.5	---
10	61025-100*-****	32.0	14.2	28.4

PART No.	61025-**0*-****				
REEL WIDTH		24	32		
PCS/REEL	2000				
REEL/BOX		12	9		
BOX/PCS		24K	18K		
CTN. SIZE	360*360*350				

GENERAL TOLERANCES		DRAWN BY	赵婷婷/2017.02.14
0.X ±0.25	X.° ±3°	CHK. BY	崔华文/2017.02.14
0.XX ±0.12		APRV. BY	洪新江/2017.02.14
0.XXX ±0.05	X.X° ±0.5°		

UNIT	SIZE	SCALE
MM	A4	1:1

DRAWING NO. 006-1025-001

新富尔电子有限公司
XINFUER ELECTORN CO.,LTD

SHEET	PROD. NAME	DF14B-nAWB-**
1 OF 1	PART NO.	61025-**0*-****

TITLE: 1.25 WTB CONN. SMT SINGLE ROW RIGHT-ANGLE

借用登记
旧底图总号
底图总号
签 字
日 期