
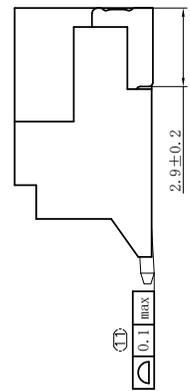
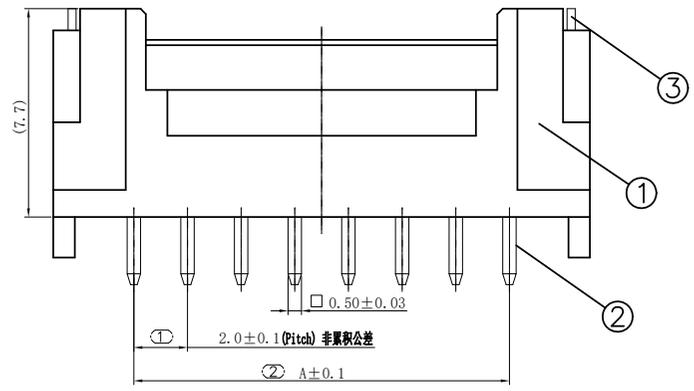
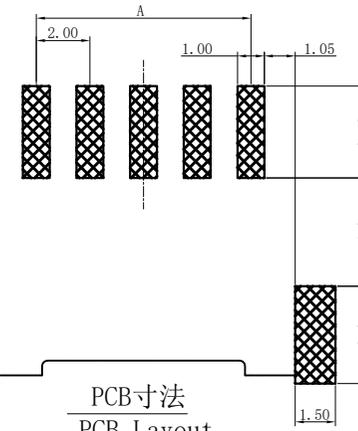
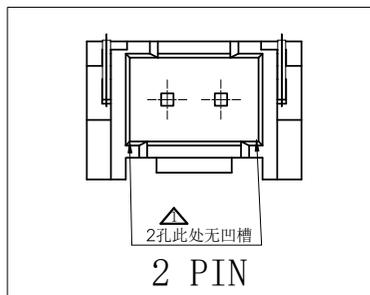
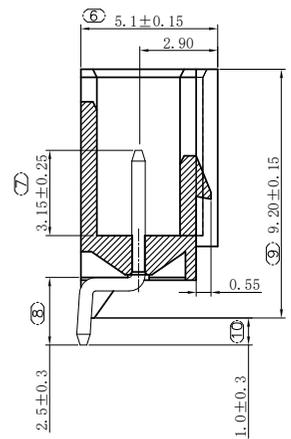


REV.	DESCRIPTION	DATE
A/0	新版发行	2017.03.09
A/1	添加“XFE”商标	2017.06.08

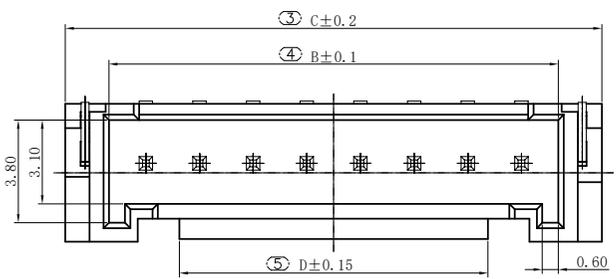

- NOTES:
- MATERIAL SEE TABLE;
 - PLATING SEE TABLE;
 - RATING
 - 3-1. OPERATING TEMPERATURE: -25~85°C
 - 3-2. OPERATING VOLTAGE: 250V AC/DC
 - 3-3. CURRENT RATING: 2AMPS(24#)
 - 3-4. DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC/Minute;
 - 3-5. INSULATION RESISTANCE: 1000MΩ Min;
 - 3-6. CONTACT RESISTANCE: 0.03Ω Max;
 - PART NO.

61037-**01-5001

SERIES: Lead Free & HF, 5=Halogen-Free

CIRCUIT NO: 2-16

Packing Option: 0=Reel Packing, 1=Tube Packing

Plating: 1=BRIGHT-TIN 80μ"Min., OVER Ni 30μ"Min..

CKT	Dim A	Dim B	Dim C	Dim D
2	2	4.75	8	2.8
3	4	6.75	10	3.2
4	6	8.75	12	3.5
5	8	10.75	14	5.5
6	10	12.75	16	7.5
7	12	14.75	18	9.5
8	14	16.75	20	11.5
9	16	18.75	22	13.5
10	18	20.75	24	15.5
11	20	22.75	26	15.5
12	22	24.75	28	15.5
13	24	26.75	30	15.5
14	26	28.75	32	15.5
15	28	30.75	34	15.5
16	30	32.75	36	15.5


借用登记

旧底图总号

底图总号

签字

日期

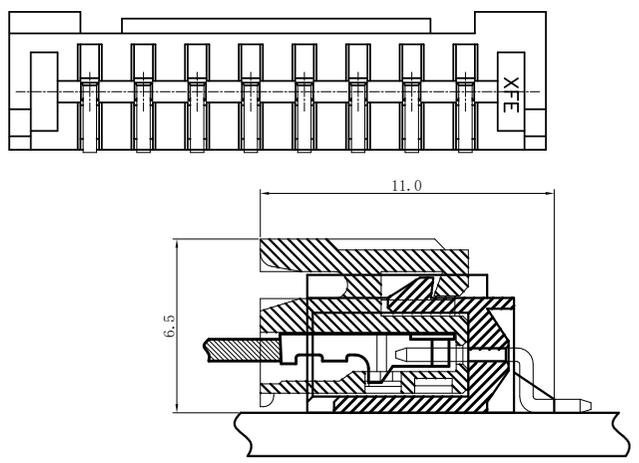

嵌合图面

序号	图号	名称	材料	数量	附注
3	122-1037-001	新 Fitting Nail	磷 Phosphor Bronze	2	镀(金): 材料镀层30u"MIN, 镀80u"MIN.
2	112-1037-001	新 Contact	磷 Brass	n×1	镀(金): 材料镀层30u"MIN, 镀80u"MIN.
1	132-1037-001	基板 Wafer	LCP(UL94V-0)	1	裸

GENERAL TOLERANCES		DRAWN BY	赵博博/2017.03.09	新富尔电子有限公司 XINFUER ELECTORN CO.,LTD
0.X ±0.25	X.* ±3°	CHK. BY	崔华文/2017.03.09	
0.XX ±0.12		APRV. BY	洪新江/2017.03.09	
0.XXX ±0.05	X.X* ±0.5°	DRAWING NO.	006-1037-001	SHEET 1 OF 1 PROD. NAME PH-nAWB-DK PART NO. 61037-**01-5001 TITLE 2.0 WTB CONN. SMT SINGLE ROW RIGHT-ANGLE