

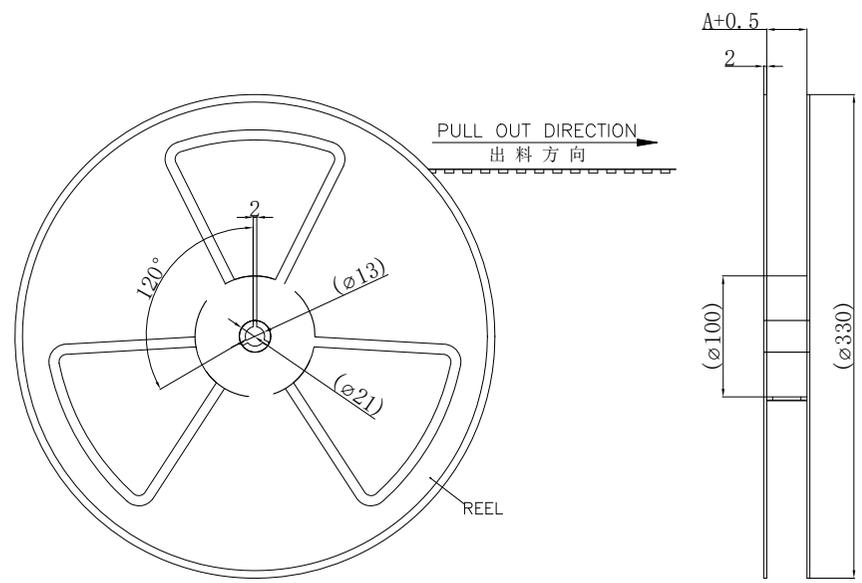
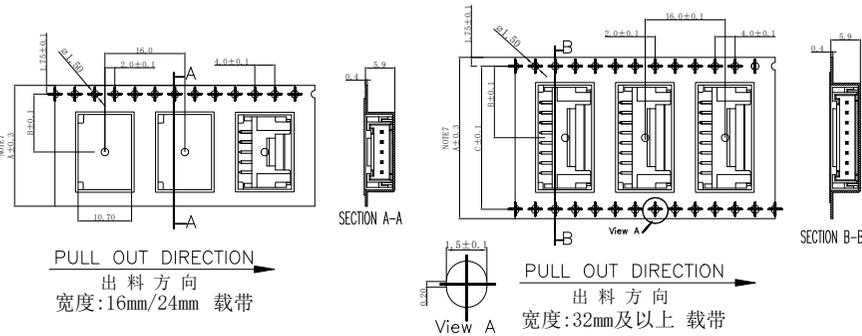


REV.	DESCRIPTION	DATE
B/0	升B版	2017.02.07

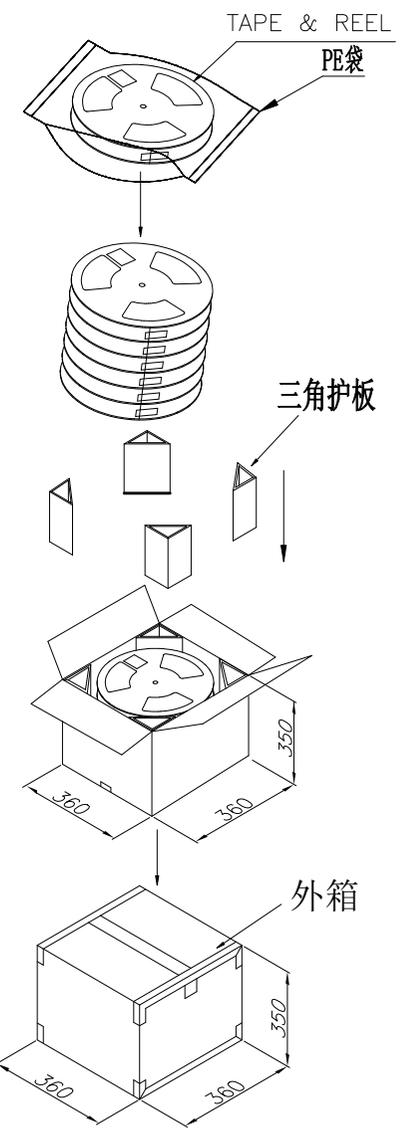

- Note:
- 1.Sprocket holes pitch cumulative tolerance ± 0.1 . (Accumulative Pitch ± 0.2)
 - 2.Carrier camber is within 1mm in 100mm.
 - 3.All dimensions meet EIA-481-D requirements.
 - 4.Thick ness: 0.4 ± 0.1 mm.
 - 5.Material of top fape: PET, PE, PEF
 - 6.Material of carrier fape: Poystyrene
 - 7.For tape width (dimension A) 16mm and 24mm a pilot hole is provided on one side. For tape width (dimension A) 32mm and 44mm pilot holes are provided on both sides.

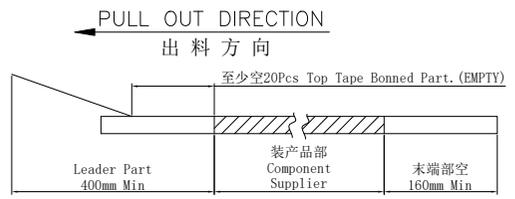

载带带头及带尾尺寸
Lead tape length

至少空20Pcs Top Tape Bonned Part. (EMPTY)

Leader Part 400mm Min

装产品部 Component Supplier

末端部空 160mm Min

载带上下带剥离强度: 0.1N--1.3N (10g-130g)
Peeling off force of top tape: 0.1N--1.3N (10g-130g)

借用登记

旧底图总号

底图总号

签字

日期

PART No.		61037-**-0*-**					GENERAL TOLERANCES			DRAWN BY 赵博博/2017.02.07		 新富尔电子有限公司 XINFUER ELECTORN CO.,LTD	
REEL WIDTH	16	24	32	44	56	0.X ± 0.25	X.' $\pm 3'$	CHK. BY 崔华文/2017.02.07					
PCS/REEL	700					0.XX ± 0.12	APRV. BY 洪新江/2017.02.07		SHEET	PROD. NAME	PH-nAWB-DK		
REEL/BOX	16	12	9	7	5	0.XXX ± 0.05	X.X' $\pm 0.5'$	1 OF 1	PART NO.	61037-**-0*-**			
BOX/PCS	11.4K	8.4K	6.3K	4.9K	3.5K	UNIT	SIZE	SCALE	DRAWING NO.		TITLE		
CTN. SIZE	360*360*350					MM	A4	1:1	004-1037-001			2.0 WTB CONN. SMT SINGLE ROW RIGHT-ANGLE CONTACT	

芯数 Pin (n)	PART NO.	尺寸 Size		
		A	B	C
2	61037-0201-5077 (PH-2AWB-DK-NB) 振邦专用	16.0	7.5	---
2-5	61037-020*-**0**---61037-050*-**0**	24.0	11.5	---
6-8	61037-060*-**0**---61037-080*-**0**	32.0	14.2	28.4
8	61037-0801-5017 (PH-8AWB-DK-DC) 大成专用	44.0	20.2	40.4
9-14	61037-090*-**0**---61037-140*-**0**	44.0	20.2	40.4
15-16	61037-150*-**0**---61037-160*-**0**	56.0	26.2	52.4