






REV.	DESCRIPTION	DATE
B/0	升级版本	2017.02.24

NOTES:
 1. MATERIAL SEE TABLE;
 2. PLATING SEE TABLE;
 3. RATING
 3-1. OPERATING TEMPERATURE:-25~85°C
 3-2. OPERATING VOLTAGE: 250V AC/DC
 3-3. CURRENT RATING: 2 AMPS(24#)
 3-4. DIELECTRIC WITHSTANDING VOLTAGE:
 1000V AC/Minute;
 3-5. INSULATION RESISTANCE:1000MΩ Min;
 3-6. CONTACT RESISTANCE:0.03Ω Max;
 4. PART NO.
 61039-**01-5001
 SERIES
 CIRCUIT NO. 2-16
 Packing Option:
 0=Reel Packing
 Lead Free & HF
 5=Halogen-Free
 Plating:
 1=BRIGHT-TIN 80μ*Min
 OVER Ni 30μ*Min..

CKT	dim A	dim B	dim C	dim D
2	2	1.2	8	4.8
3	4	1.8	10	6.8
4	6	3.8	12	8.8
5	8	5.8	14	10.8
6	10	7.8	16	12.8
7	12	9.8	18	14.8
8	14	11.8	20	16.8
9	16	13.8	22	18.8
10	18	15.8	24	20.8
11	20	17.8	26	22.8
12	22	19.8	28	24.8
13	24	21.8	30	26.8
14	26	23.8	32	28.8
15	28	25.8	34	30.8
16	30	27.8	36	32.8

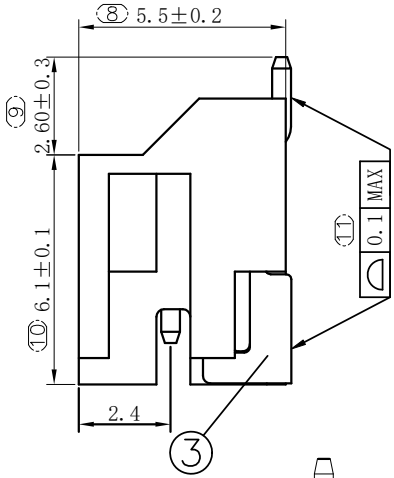

SECTION A-A

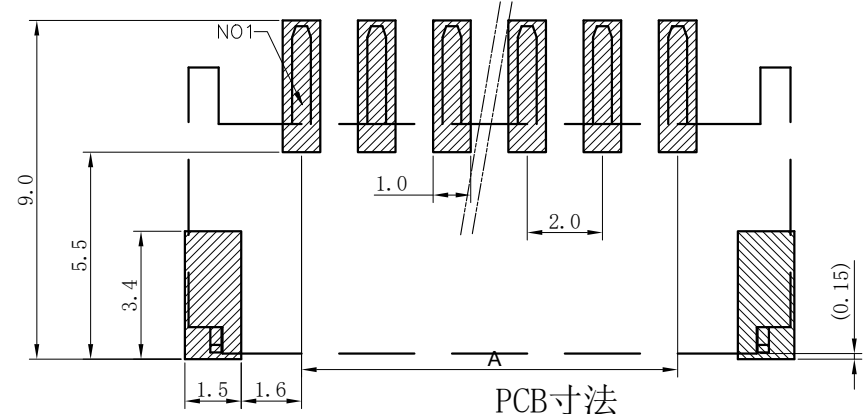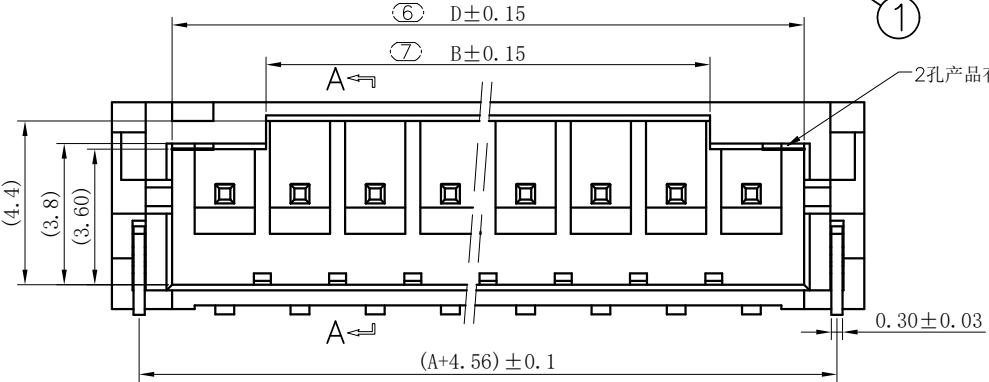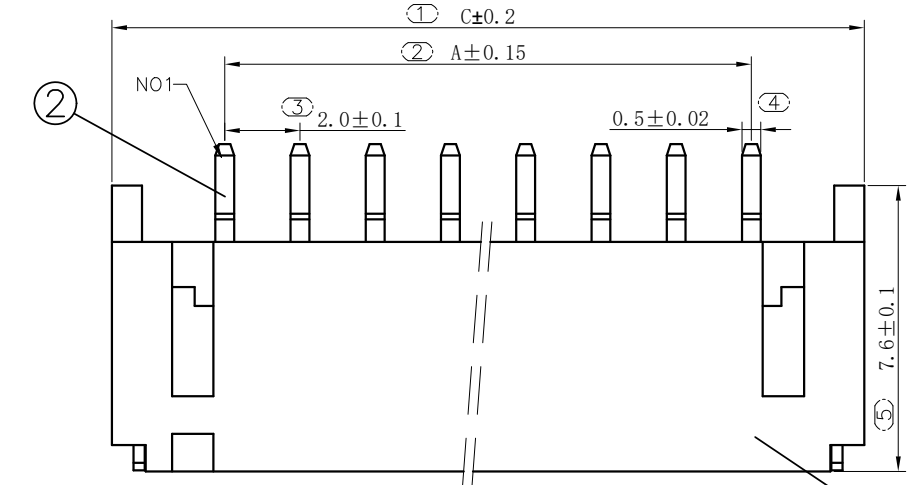

PCB寸法
PCB Layout

序号	图号	名称	材料	数量	附注
4					
3	122-1039-001	薄片 Fitting Nail	磷青铜 Phosphor Bronze	2	电镀(锡): 整个表面镀层30u*MIN, 再镀锡80u*MIN.
2	112-1035-005	端子 Contact	黄铜 Brass	2	电镀(锡): 整个表面镀层30u*MIN, 再镀锡80u*MIN.
1	132-1039-001	基座 Housing	LCP (UL94V-0)	1	本色

GENERAL TOLERANCES		DRAWN BY	赵博群/2017.02.24		
0.X	±0.25	X.°	±3°	CHK. BY	崔华文/2017.02.24
0.XX	±0.12			APRV. BY	洪新江/2017.02.24
0.XXX	±0.05	X.X°	±0.5°	DRAWING NO.	006-1039-001
UNIT	SIZE	SCALE	DRAWING NO. 006-1039-001		
MM	A4	1:1	TITLE 2.0 WTB CONN. SMT SINGLE ROW RIGHT-ANGLE		

SHEET 1 OF 1		PROD. NAME PH-nAWB	
PART NO. 61039-**01-5001		XINFUER ELECTORN CO.,LTD	

借用登记
 旧底图总号
 底图总号
 签字
 日期