

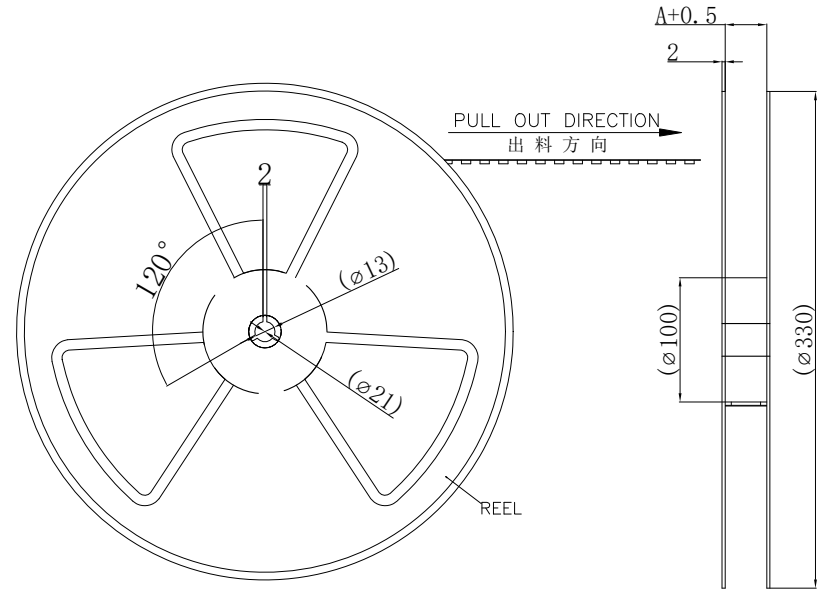
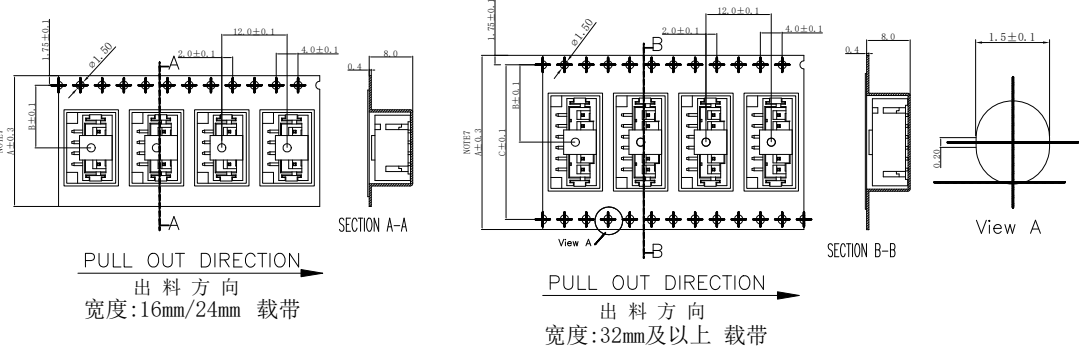


REV.	DESCRIPTION	DATE
B/0	升B版	2016.12.20

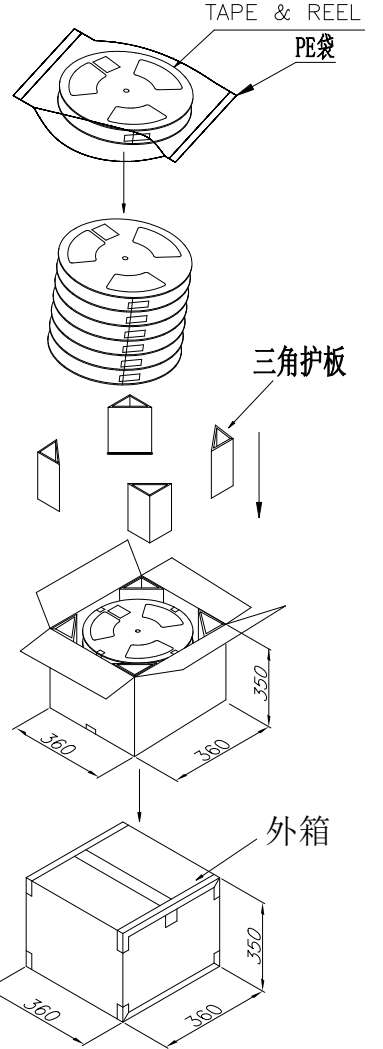


- Note:
- 1.Sprocket holes pitch cumulative tolerance ± 0.1 . (Accumulative Pitch ± 0.2)
 - 2.Carrier camber is within 1mm in 100mm.
 - 3.All dimensions meet EIA-481-D requirements.
 - 4.Thick ness: 0.4 ± 0.05 mm.
 - 5.Material of top fape: PET, PE, PEF
 - 6.Material of carrier fape: Poystyrene
 - 7.For tape width (dimension A) 16mm and 24mm a pilot hole is provided on one side. For tape width (dimension A) 32mm and 44mm pilot holes are provided on both sides.

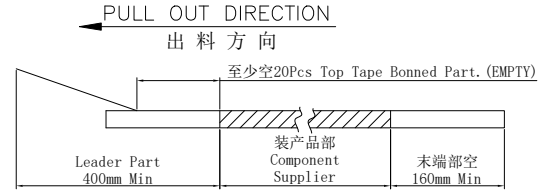

载带带头及带尾尺寸
Lead tape length

载带上下带剥离强度: 0.1N-1.3N(10g-130g)
Peeling off force of top tape:
0.1N-1.3N(10g-130g)

借用登记
旧底图总号
底图总号
签字
日期

芯数 Pin (n)	PART NO.	尺寸 Size			PART No. 61040-**-**0*-****					GENERAL TOLERANCES			DRAWN BY 赵博群/2016.12.20		 新富尔电子有限公司 XINFUER ELECTORN CO.,LTD	
		A	B	C	REEL WIDTH	16	24	32	44	56	0.X ± 0.25	X. $^{\circ}$ $\pm 3^{\circ}$	CHK. BY 崔华文/2016.12.20			
2	61040-020*-**077(振邦专用)	16.0	7.5	---	PCS/REEL	700					0.XX ± 0.12		APRV. BY 洪新江/2016.12.20	SHEET	PROD. NAME PH-nAB	
2-5	61040-020*-****-61040-050*-****	24.0	11.5	---	REEL/BOX	16	12	9	7	5	0.XXX ± 0.05	X.X. $^{\circ}$ $\pm 0.5^{\circ}$	1 OF 1	PART NO.	61040-**-**0*-****	
6-8	61040-060*-****-61040-080*-****	32.0	14.2	28.4	BOX/PCS	11.2K	8.4K	6.3K	4.9K	3.5K			DRAWING NO.	004-1040-001		
9-14	61040-090*-****-61040-140*-****	44.0	20.2	40.4	CTN. SIZE	360*360*350					UNIT	SIZE	SCALE	TITLE 2.0 WTB CONN. SMT SINGLE ROW VERTICAL		
15-16	61040-150*-****-61040-160*-****	56.0	26.2	52.4	MM	A4	1:1	