




REV.	DESCRIPTION	DATE
A/0	新版发行	2017.03.21
A/1	商标XFE改为 X	2018.04.18

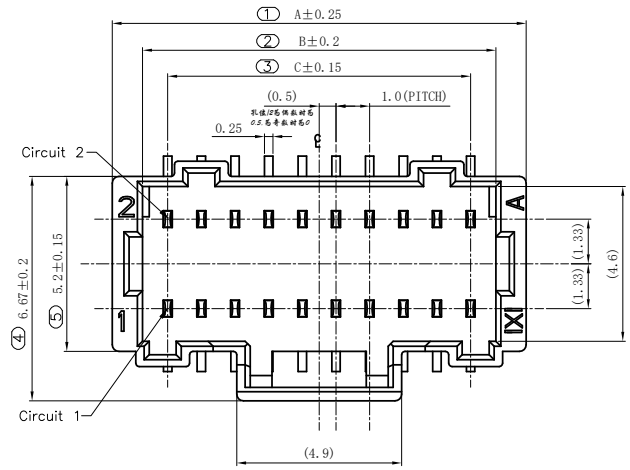

NOTES:




- MATERIAL SEE TABLE;
- PLATING SEE TABLE;
- RATING
- OPERATING TEMPERATURE: -25~85°C
- OPERATING VOLTAGE: 50V AC/DC
- CURRENT RATING: 1AMPS(28#)
- DIELECTRIC WITHSTANDING VOLTAGE: 500V AC/Minute;
- INSULATION RESISTANCE: 100MΩ Min;
- CONTACT RESISTANCE: 0.03Ω Max;
- PART NO.

61060-**03-1001

SERIES
CIRCUIT NO
Packing Option:
0=Reel Packing

Lead Free & HF
1=Lead Free

Plating:
3=Gold Flash
OVER Ni 30μ"Min..

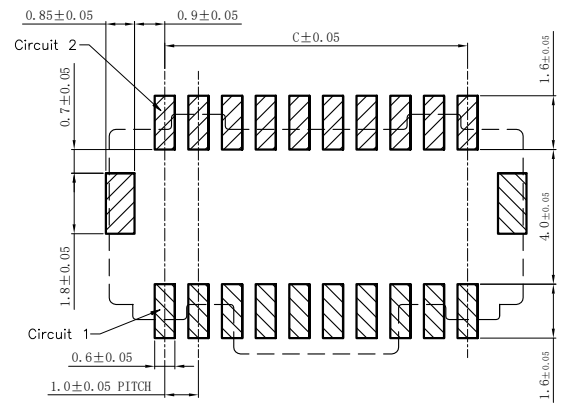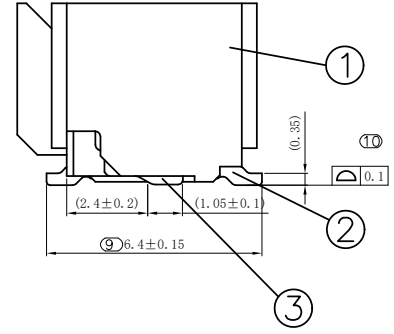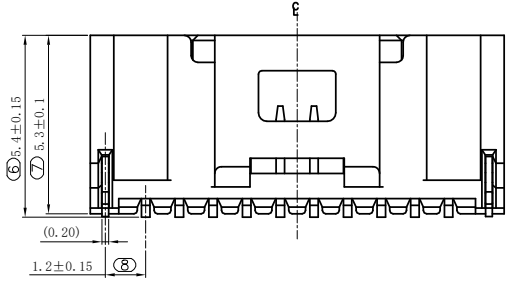

孔位 poles	A	B	C
20	12.3	10.5	9.0
30	17.3	15.5	14.0
40	22.3	20.5	19.0
50	27.3	25.5	24.0

3	152-1060-001	盖子	PA9T(UL94V-0)	1	本色
3	122-1060-001	脚片 Fitting Nail	磷青铜 Phosphor Bronze	2	电镀(锡): 整个表面镀底镍30u"MIN,再镀铜80u"MIN.
2	112-1060-001	端子 Contact	磷青铜 Phosphor Bronze	n×1	电镀: 整个表面镀底镍30u"MIN,再镀金Gold Flash.
1	132-1060-001	基板 Wafer	PA6T(UL94V-0)	1	本色
序号	图号	名称	材料	数量	备注

GENERAL TOLERANCES			DRAWN BY 赵婷婷/2017.03.21		 新富尔电子有限公司 XINFUER ELECTORN CO.,LTD
0.X	±0.25	X.* ±3°	CHK. BY 崔华文/2017.03.21		
0.XX	±0.12		APRV. BY 洪新江/2017.03.21		
0.XXX	±0.05	X.X.* ±0.5°	SHEET 1 OF 1	PROD. NAME SHD-2XnAB-DK-GF	
UNIT MM	SIZE A4	SCALE 1:1	DRAWING NO. 006-1060-002		PART NO. 61060-**03-1001
TITLE 1.0 WTB CONN. SMT SINGLE ROW VERTICAL					

PCB寸法
PCB Layout

借用登记

旧底图总号

底图总号

签字

日期