

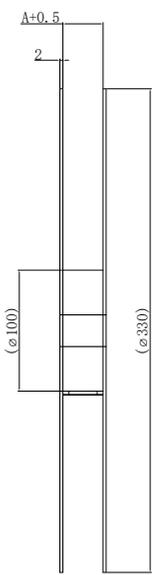


REV.	DESCRIPTION	DATE
B/0	升 B 版	2017.04.20

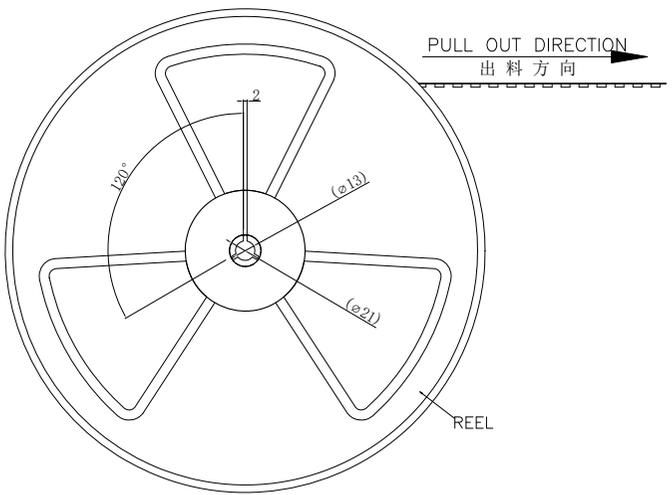



- Note:
- 1.Sprocket holes pitch cumulative tolerance ± 0.1 . (Accumulative Pitch ± 0.2)
 - 2.Carrier camber is within 1mm in 100mm.
 - 3.All dimensions meet EIA-481-D requirements.
 - 4.Thick ness: 0.4 ± 0.1 mm.
 - 5.Material of top fape: PET, PE, PEF
 - 6.Material of carrier fape: Poystyrene
 - 7.For tape width (dimension A) 16mm and 24mm a pilot hole is provided on one side. For tape width (dimension A) 32mm and 44mm pilot holes are provided on both sides.

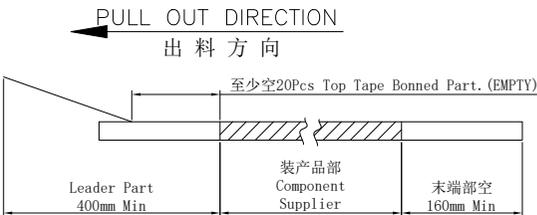

载带带头及带尾尺寸
Lead tape length



载带上下带剥离强度: 0.1N-1.3N(10g-130g)
Peeling off force of top tape:
0.1N-1.3N(10g-130g)

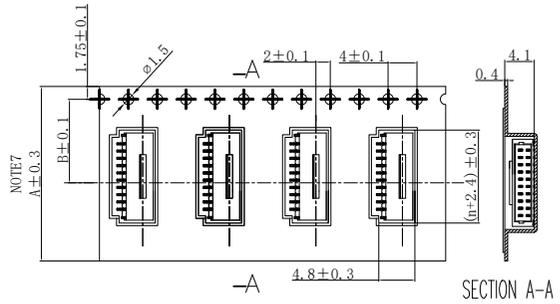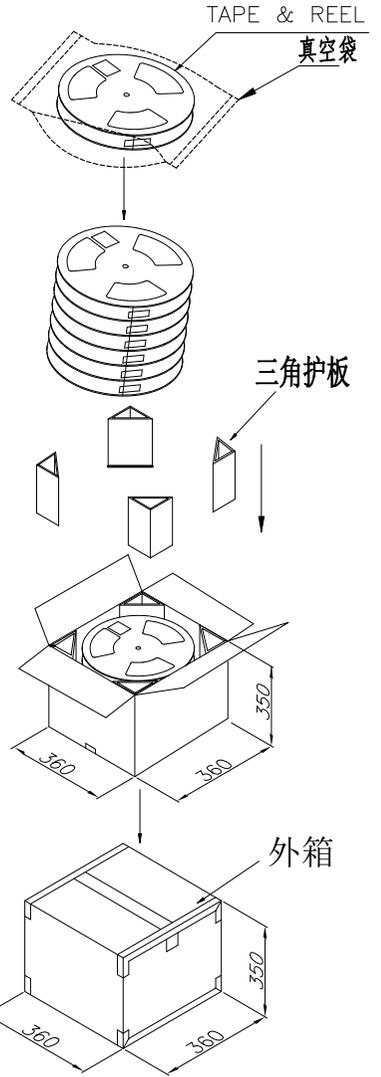

PULL OUT DIRECTION
出料方向
宽度: 16mm/24mm 载带

借用登记
旧底图总号
底图总号

签字
日期

芯数 Pin (n)	PART NO.	尺寸 Size		
		A	B	C
3金胜	61068-0301-5571	12.0	5.5	---
2-6	61068-020*-*****-61068-060*-*****	16.0	7.5	---
7-10	61068-070*-*****-61068-100*-*****	24.0	11.5	---

PART No.	61068-**0*-**** (不加盖)			GENERAL TOLERANCES			DRAWN BY	赵博博/2017.04.20		
REEL WIDTH	12	16	24	0.X	± 0.25	X. $^{\circ}$	$\pm 3^{\circ}$	CHK. BY	崔华文/2017.04.20	
PCS/REEL	1500			0.XX	± 0.12	APRV. BY			洪新江/2017.04.20	
REEL/BOX	20	16	12	0.XXX	± 0.05	X.X. $^{\circ}$	$\pm 0.5^{\circ}$	DRAWING NO.	004-1068-001	
BOX/PCS	30K	24K	18K	UNIT	SIZE	SCALE		SHEET		1 OF 1
CTN. SIZE	360*360*350			MM	A4	1:1		TITLE		1.0 WT8 CONN. SMT SINGLE ROW RIGHT-ANGLE

ZJ XFE 新富尔电子
XINFUER ELECTORN CO.,LTD

新富尔电子有限公司
XINFUER ELECTORN CO.,LTD

PROD. NAME 1.0T9-nAWB
PART NO. 61068-**0*-****