

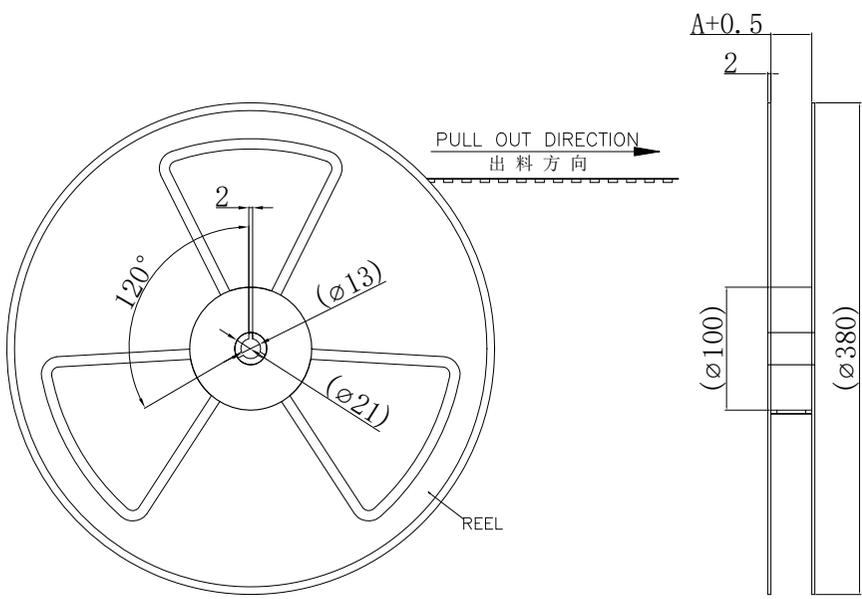


REV.	DESCRIPTION	DATE
B/0	增加2X15和2X20孔位	2017.5.2

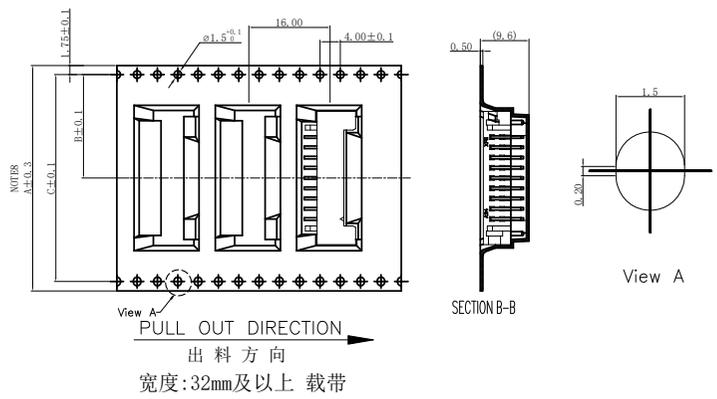


Note:

- Sprocket holes pitch cumulative tolerance  $\pm 0.1$ . (Accumulative Pitch  $\pm 0.2$ )
- Carrier camber is within 1mm in 100mm.
- Number of connectors: 500Pcs/REEL
- All dimensions meet EIA-481-D requirements.
- Thickness:  $0.4 \pm 0.1$ mm.
- Material of top fape: PET, PE, PEF
- Material of carrier fape: Poystyrene
- For tape width (dimension A) 16mm and 24mm a pilot hole is provided on one side. For tape width (dimension A) 32mm and 44mm pilot holes are provided on both sides.

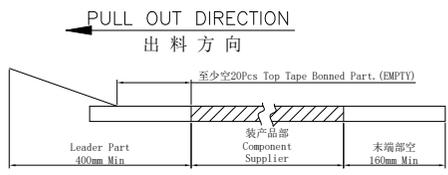

载带带头及带尾尺寸  
Lead tape length

载带上下带剥离强度: 0.1N—1.0N (10g—100g)  
Peeling off force of top tape:  
0.1N—1.0N (10g—100g)

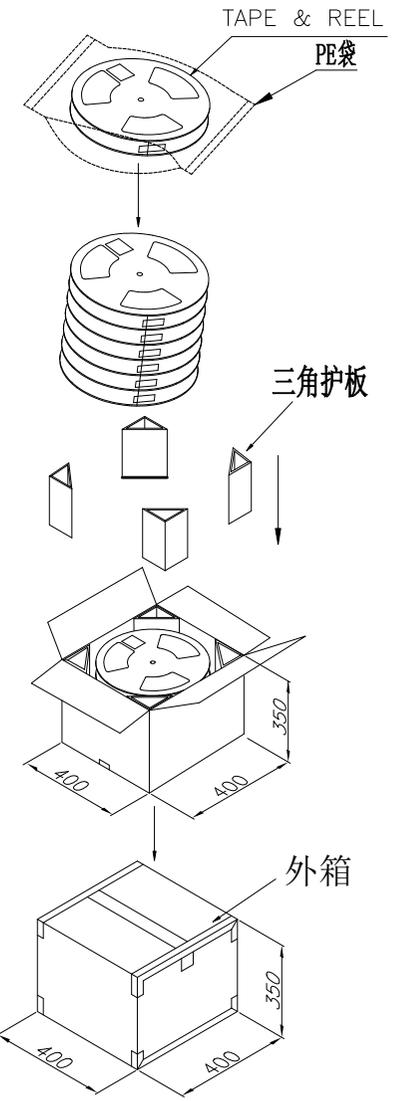

ROHS管理规定:

- 禁止使用含有ROHS指令所限制的物质。
- 对应的SGS或ITS出具的ICP-AES数据、不可测定物质的成分表，有效期一年。

借用登记  
旧底图总号  
底图总号  
签字  
日期

PART No.	61080-**-02-**00*			
REEL WIDTH	44	56		
PCS/REEL	500			
REEL/BOX	7	5		
BOX/PCS	3.5K	2.5K		
CTN. SIZE	400*400*350			

GENERAL TOLERANCES			DRAWN BY	赵博群/2017.5.2	
0.X	$\pm 0.25$	X.°	$\pm 3^\circ$	CHK. BY	崔华文/2017.5.2
0.XX	$\pm 0.12$	APRV. BY			洪新江/2017.5.2
0.XXX	$\pm 0.05$	X.X°	$\pm 0.5^\circ$	DRAWING NO.	004-1080-001

**ZJ-XFE** 新富尔电子  
XINFUER ELECTORN CO.,LTD

新富尔电子有限公司  
XINFUER ELECTORN CO.,LTD

SHEET 1 OF 1  
PROD. NAME PHD-2XnAW-DKF-\*PART NO. 61080-\*\*-02-\*\*00\*TITLE 2.0 WTB CONN. DIP DUAL ROW RIGHT-ANGLE

芯数 Pin (n)	PART NO.	尺寸 Size		
		A	B	C
14-20	61080-1402-**00*---61080-2002-**00*	44.0	20.2	40.4
24-26	61080-2402-**00*---61080-2602-**00*	56.0	26.2	52.4