
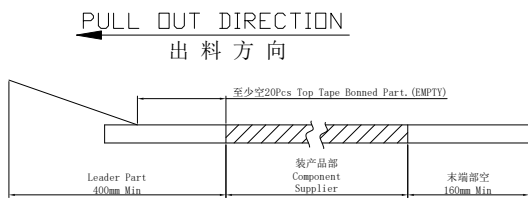


# 0.5D立贴连带包装规格






REV.	DESCRIPTION	DATE
B/0	升B版	2017.02.10

Note:


- 1.Sprocket holes pitch cumulative tolerance  $\pm 0.1$ . (Accumulative Pitch  $\pm 0.2$ )
- 2.Carrier camber is within 1mm in 100mm.
- 3.All dimensions meet EIA-481-D requirements.
- 4.Thick ness:  $0.4 \pm 0.1$ mm.
- 5.Material of top fape: PET, PE, PEF
- 6.Material of carrier fape: Poystyrene
- 7.For tape width (dimension A) 16mm and 24mm a pilot hole is provided on one side. For tape width (dimension A) 32mm and 44mm pilot holes are provided on both sides.

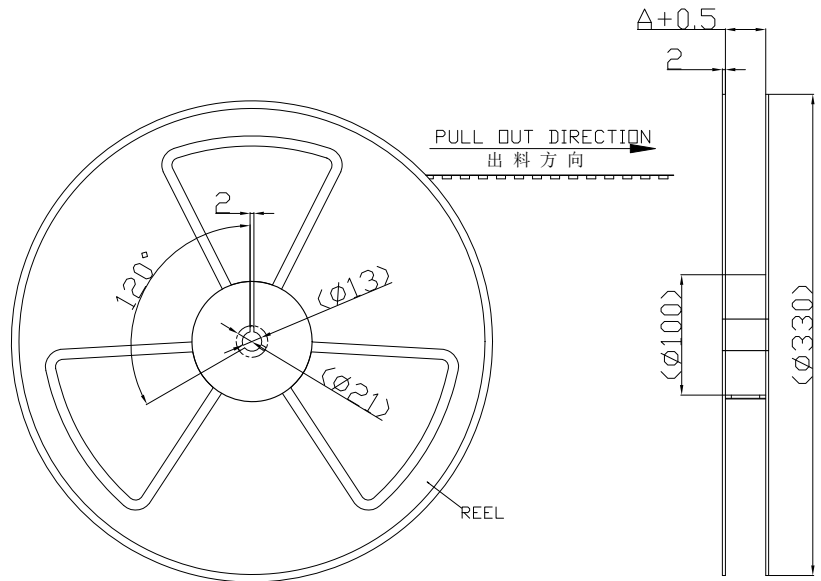


载带带头及带尾尺寸  
Lead tape length

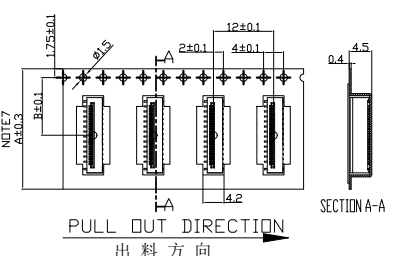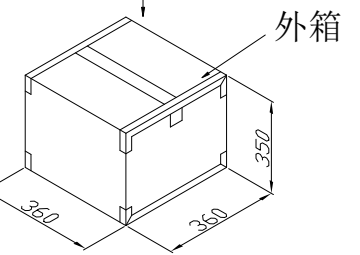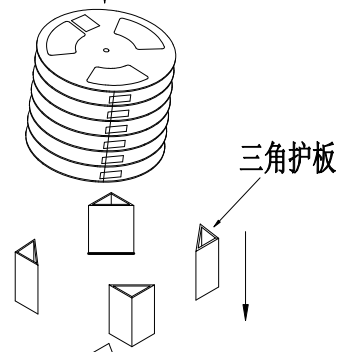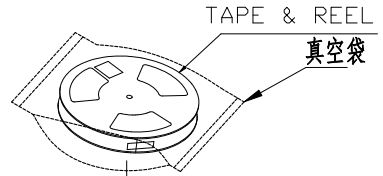

宽度: 16mm/24mm 载带

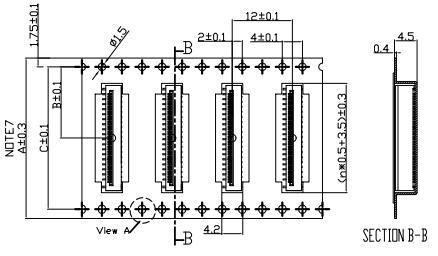

宽度: 32mm及以上 载带

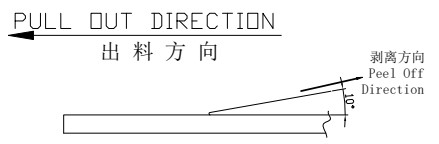

载带上下带剥离强度: 0.1N--1.3N(10g-130g)  
Peeling off force of top tape:  
0.1N--1.3N(10g-130g)

借用登记  
旧底图总号  
底图总号  
签字  
日期

芯数 Pin (n)	PART NO.	尺寸 Size		
		A	B	C
8-26	60011/60012-080*-*****-60011/60012-260*-*****	24.0	11.5	---
40	60011/60012-400*-*****	44.0	20.2	40.4

PART No.	0.5D-nPLB/PLBF		
REEL WIDTH	24	44	
PCS/REEL	1000		
REEL/BOX	12	7	
BOX/PCS	12K	7K	
CTN. SIZE	360*360*350		

GENERAL TOLERANCES		
0.X	$\pm 0.25$	X.* $\pm 3^*$
0.XX	$\pm 0.12$	
0.XXX	$\pm 0.05$	X.X.* $\pm 0.5^*$
UNIT	MM	A4
SCALE	1:1	

DRAWN BY	赵博博/2017.02.10
CHK. BY	崔华文/2017.02.10
APRV. BY	洪新江/2017.02.10
DRAWING NO.	004-0011-001

**ZJ-XFE** 新富尔电子有限公司  
XINFUER ELECTORN CO.,LTD

SHEET 1 OF 1  
PROD. NAME 0.5D-nPLB/nPLBF  
PART NO. 60011/60012

TITLE  
0.5 FPC CONN. NON- ZIF SMT H=3.8 VERTICAL CONTACT