
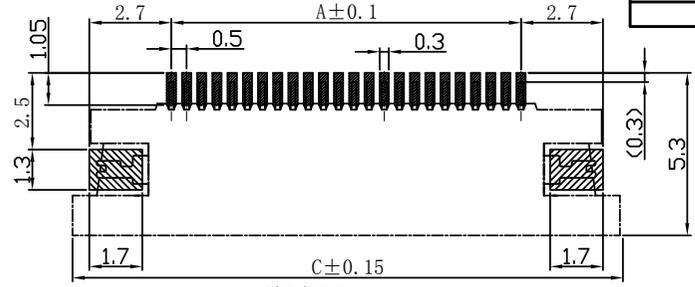


REV.	DESCRIPTION	DATE
8/0	升B版	2016.12.26

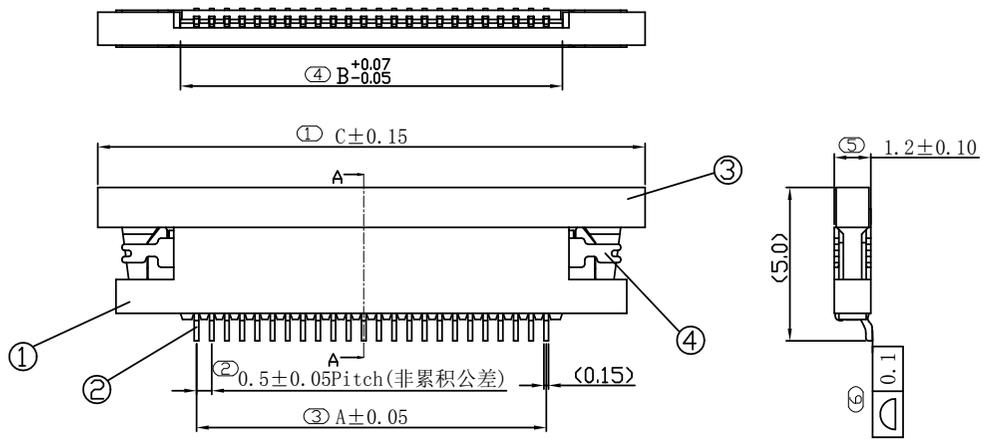

适用线路板  
RECOMMENDED PCB LAYOUT

60019-0602-1001



CKT	Dim A	Dim B	Dim C	CKT	Dim A	Dim B	Dim C
4	1.5	2.56	8	34	16.5	17.56	23
5	2	3.06	8.5				
6	2.5	3.56	9				
8	3.5	4.56	10				
10	4.5	5.56	11	40	19.5	20.56	26
12	5.5	6.56	12				
13	6	7.06	12.5				
14	6.5	7.56	13				
15	7	8.06	13.5				
16	7.5	8.56	14				
18	8.5	9.56	15				
20	9.5	10.56	16				
22	10.5	11.56	17	50	24.5	25.56	31
24	11.5	12.56	18				
25	12	13.06	18.5	54	26.5	27.56	33
26	12.5	13.56	19				
28	13.5	14.56	20				
30	14.5	15.56	21				
32	15.5	16.56	22				

NOTES:  
 1. MATERIAL SEE TABLE;  
 2. PLATING SEE TABLE;  
 3. RATING  
 3-1. OPERATING TEMPERATURE: -25~85°C  
 3-2. OPERATING VOLTAGE: 50V AC/DC  
 3-3. CURRENT RATING: 0.5 AMPS  
 3-4. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC/Minute;  
 3-5. INSULATION RESISTANCE: 500MΩ Min;  
 3-6. CONTACT RESISTANCE: 0.03Ω Max;  
 4. PART NO.  
 60019-\*\*02-1001

SERIES:   
 04-60: Lead Free & HF  
 1=Lead Free

Plating:  
 2=MATTE-TIN  
 80 μ Min OVER Ni  
 30 μ Min..

Packing Option:  
 0=Reel Packing  
 1=Tube Packing

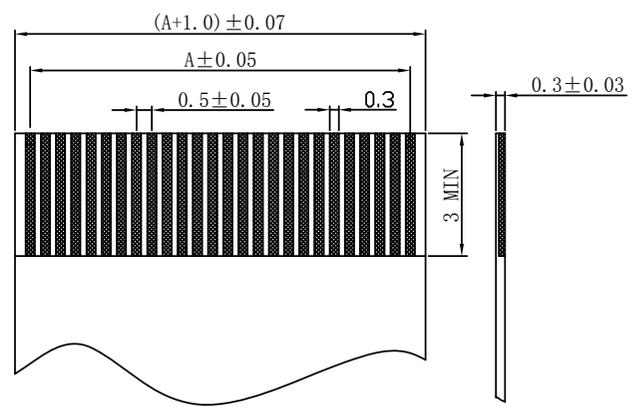

适用FPC寸法  
APPLICABLE FPC

序号	图号	名称	材料	数量	附注
4	122-0019-001	插针 Fitting Nail	磷青铜 Phosphor Bronze	2	镀(金): 至少镀层30u"Min, 镀(银)30u"Min..
3	142-0019-001	物 Actuator	PPS(UL94V-0)	1	黄绿色
2	112-0019-001	簧 Contact	磷青铜 Phosphor Bronze	n*1	镀(金): 至少镀层30u"Min, 镀(银)30u"Min..
1	132-0019-001	基 Housing	LCP(UL94V-0)	1	枪

GENERAL TOLERANCES			DRAWN BY	新富尔电子有限公司	
0.X	±0.25	X.* ±3'	赵婷婷/2016.12.26	XINFUER ELECTORN CO.,LTD	
0.XX	±0.12		崔华文/2016.12.26	SHEET	
0.XXX	±0.05	X.X' ±0.5'	洪新江/2016.12.26	PROD. NAME	0.5J-nPBX
UNIT	SIZE	SCALE	DRAWING NO.	1 OF 1	PART NO.
MM	A4	1:1	006-0019-001		60019-**02-1001
			TITLE	0.5 FPC CONN. ZIF SMT FRONTFLIP H=1.2 LOWER CONTACT	

借用登记  
   
   
旧底图总号  
   
底图总号  
   
签字  
   
日期