



REV.	DESCRIPTION	DATE
B/0	升B版	2016.12.26

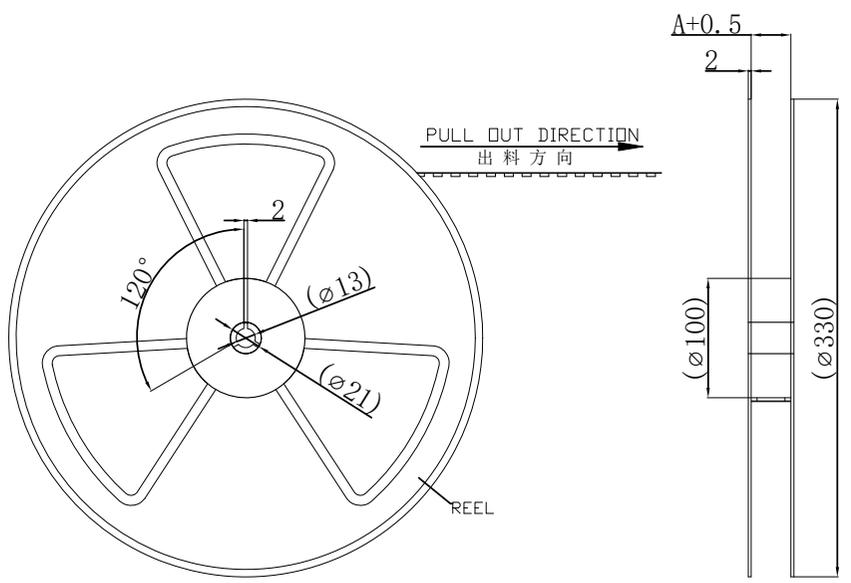

Note:

- 1.Sprocket holes pitch cumulative tolerance ± 0.1 (Accumulative Pitch ± 0.2)
- 2.Carrier camber is within 1mm in 100mm.
- 3.Number of connectors: 5000Pcs/REEL
- 4.All dimensions meet EIA-481-D requirements.
- 5.Thick ness: 0.4 ± 0.1 mm.
- 6.Material of top fape: PET, PE, PEF
- 7.Material of carrier fape: Poystyrene
- 8.For tape width (dimension A) 16mm and 24mm a pilot hole is provided on one side. For tape width (dimension A) 32mm and 44mm pilot holes are provided on both sides.


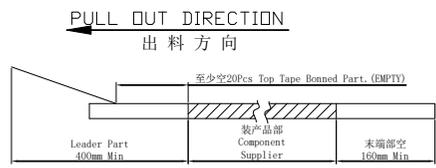


载带带头及带尾尺寸
Lead tape length



载带上下带剥离强度: 0.1N--1.3N(10g-130g)
Peeling off force of top tape:
0.1N--1.3N(10g-130g)

ROHS管理规定:
1、禁止使用含有ROHS指令所限制的物质。
2、对应的SGS或ITS出具的ICP-AES数据、不可测定物质的成分表,有效期一年。

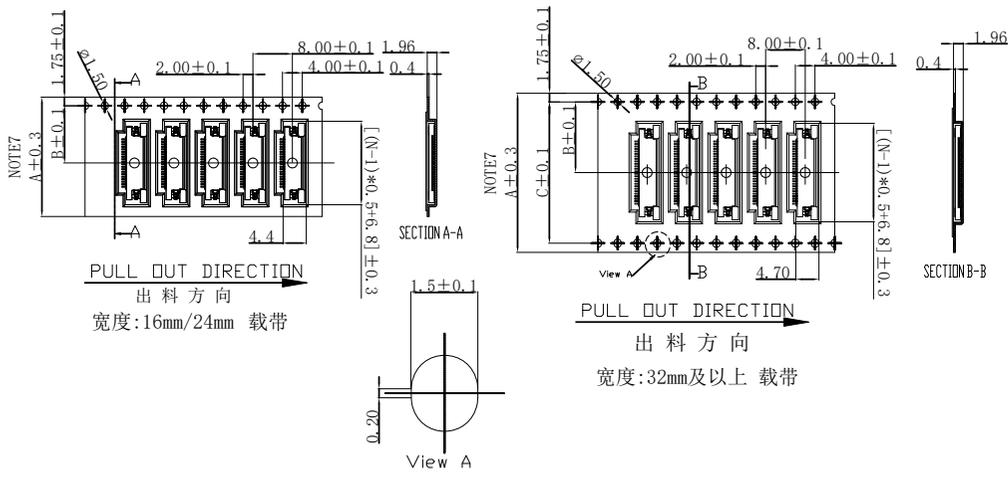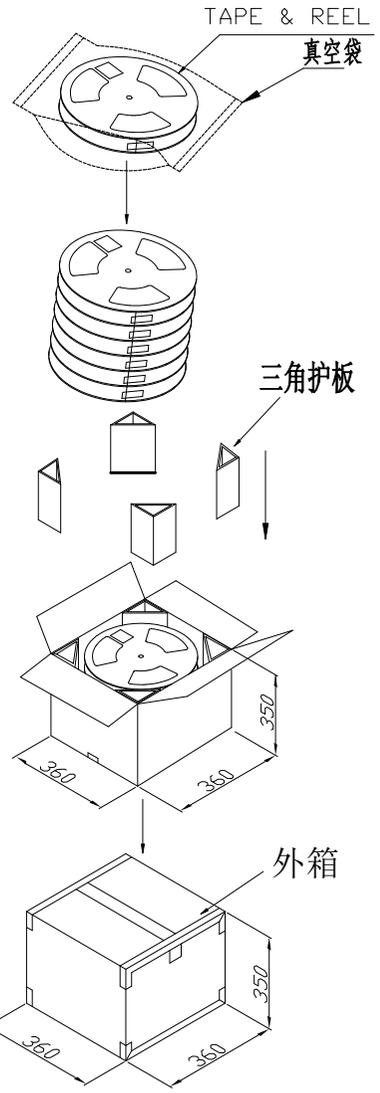

借用登记
旧底图总号
底图总号
签字
日期

芯数 Pin (n)	PART NO.	尺寸 Size		
		A	B	C
5-16	60019/60020-050*-****-60019/60020-160*-****	24.0	11.5	---
22-30	60019/60020-220*-****-60019/60020-300*-****	32.0	14.2	28.4
40-50	60019/60020-400*-****-60019/60020-500*-****	44.0	20.2	40.4
		56.0	26.2	52.4

PART No.	60019/60020-**-****
REEL WIDTH	24 32 44 56
PCS/REEL	5000
REEL/BOX	12 9 7 5
BOX/PCS	60K 45K 35K 25K
CTN. SIZE	360*360*350

GENERAL TOLERANCES		
0.X	± 0.25	X.° $\pm 3^\circ$
0.XX	± 0.12	
0.XXX	± 0.05	X.X° $\pm 0.5^\circ$
UNIT	SIZE	SCALE
MM	A4	1:1

DRAWN BY	赵博群/2016.12.26
CHK. BY	崔华文/2016.12.26
APRV. BY	洪新江/2016.12.26
DRAWING NO.	004-0019-001

ZIF XFE 新富尔电子有限公司
XINFUER ELECTORN CO.,LTD

SHEET 1 OF 1
PROD. NAME 0.5J-nPBX/nPBS
PART NO. 60019/60020-**-****

TITLE
0.5 FPC CONN. ZIF SMT FRONTFLIP H=1.2 LOWER CONTACT