

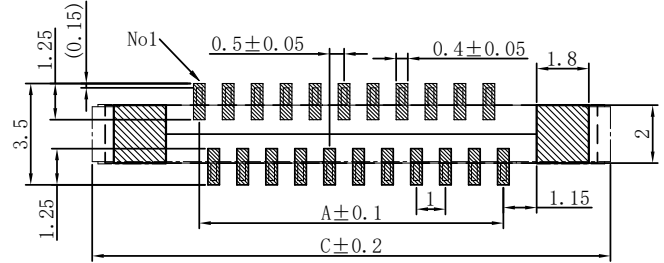


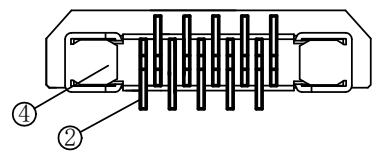




| REV. | DESCRIPTION | DATE       |
|------|-------------|------------|
| B/0  | 升级版本        | 2016.11.30 |
|      |             |            |
|      |             |            |

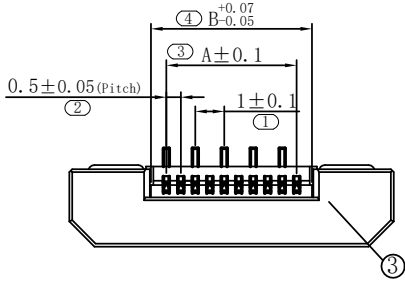

适用线路板  
RECOMMENDED PCB LAYOUT

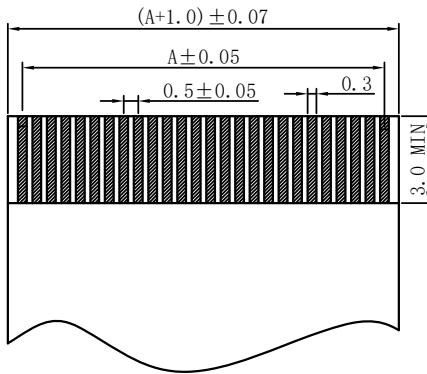

适用FPC寸法  
APPLICABLE FPC



| CKT | Dim A | Dim B | Dim C |
|-----|-------|-------|-------|
| 4   | 1.5   | 2.56  | 8.2   |
| 5   | 2     | 3.06  | 8.7   |
| 6   | 2.5   | 3.56  | 9.2   |
| 7   | 3     | 4.06  | 9.7   |
| 8   | 3.5   | 4.56  | 10.2  |
| 9   | 4     | 5.06  | 10.7  |
| 10  | 4.5   | 5.56  | 11.2  |

NOTES:

- MATERIAL SEE TABLE;
- PLATING SEE TABLE;
- RATING
- 3-1. OPERATING TEMPERATURE: -25~85°C
- 3-2. OPERATING VOLTAGE: 50V AC/DC
- 3-3. CURRENT RATING: 0.5 AMPS
- 3-4. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC/Minute;
- 3-5. INSULATION RESISTANCE: 500MΩ Min;
- 3-6. CONTACT RESISTANCE: 0.03Ω Max;
- PART NO.

60091-\*\*-01-5001

SERIES  
CIRCUIT NO.

Lead Free & HF  
1&2=Lead Free  
5&6=Halogen-Free  
Plating:  
1=BRIGHT-TIN 80μ"Min  
OVER Ni 30μ"Min..

Packing Option:  
0=Reel Packing  
1=Tube Packing

| 序号 | 图号           | 名称              | 材料                  | 数量  | 附注                                  |
|----|--------------|-----------------|---------------------|-----|-------------------------------------|
| 4  | 122-0090-001 | 垫片 Fitting Nail | 磷青铜 Phosphor Bronze | 2   | 电镀(锡): 整个表面镀底镍30u"MIN,再镀锡 80u"MIN.. |
| 3  | 142-0090-001 | 脚 Actuator      | LCP(UL94V-0)        | 1   | 黑色                                  |
| 2  | 112-0090-001 | 端子 Contact      | 磷青铜 Phosphor Bronze | n*1 | 电镀(锡): 整个表面镀底镍30u"MIN,再镀锡 80u"MIN.. |
| 1  | 132-0090-001 | 罐 Housing       | LCP(UL94V-0)        | 1   | 棕色                                  |

| GENERAL TOLERANCES |       | DRAWN BY       | 新富尔电子有限公司  |            |                       |
|--------------------|-------|----------------|--|------------|-----------------------|
| 0.X                | ±0.25 | 赵婷婷/2016.11.30 | XINFUER ELECTORN CO.,LTD                             |            |                       |
| 0.XX               | ±0.12 | 崔华文/2016.11.30 |  |            |                       |
| 0.XXX              | ±0.05 | 洪新江/2016.11.30 |  |            |                       |
| X.° ±3°            |       | DRAWING NO.    | SHEET  | PROD. NAME | 0.5-11-nPLBF-A(4-10P) |
| X.X° ±0.5°         |       |                | 006-0091-001   | 1 OF 1     | PART NO.              |
| UNIT               | SIZE  | SCALE          | TITLE  |            |                       |
| MM                 | A4    | 1:1            | 0.5 FPC CONN. ZIF SMT DRAWER H=2.65 VERTICAL CONTACT |            |                       |

借用登记




旧底图总号

底图总号






签字

日期

| REV. | DESCRIPTION | DATE       |
|------|-------------|------------|
| B/0  | 升级版本        | 2016.11.30 |
|      |             |            |

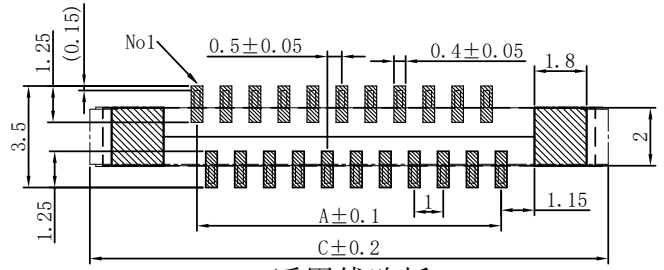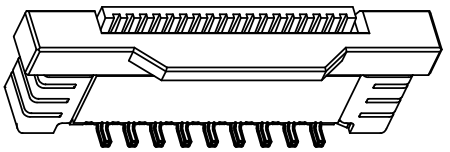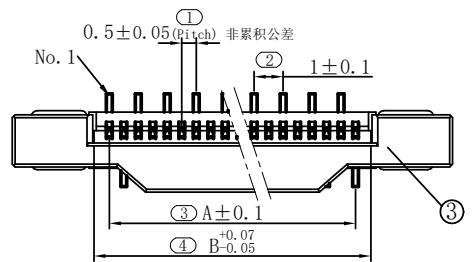

适用线路板  
RECOMMENDED PCB LAYOUT

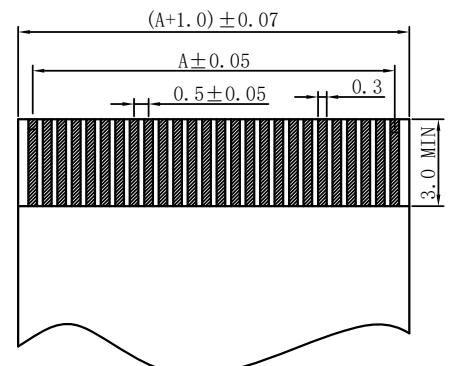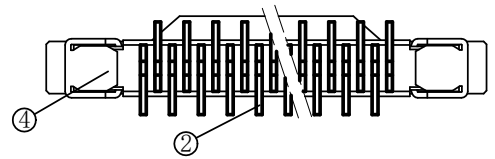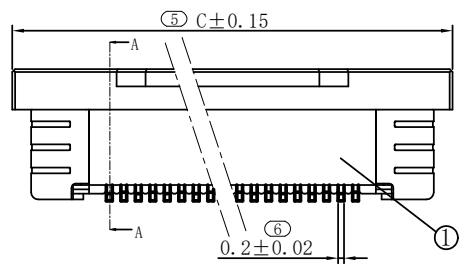

适用FPC寸法  
APPLICABLE FPC

| CKT | Dim A | Dim B | Dim C | CKT | Dim A | Dim B | Dim C |
|-----|-------|-------|-------|-----|-------|-------|-------|
| 12  | 5.5   | 6.56  | 12.2  | 36  | 17.5  | 18.56 | 24.2  |
| 13  | 6     | 7.06  | 12.7  |     |       |       |       |
| 14  | 6.5   | 7.56  | 13.2  |     |       |       |       |
| 15  | 7     | 8.06  | 13.7  | 40  | 19.5  | 20.56 | 26.2  |
| 16  | 7.5   | 8.56  | 14.2  |     |       |       |       |
| 18  | 8.5   | 9.56  | 15.2  |     |       |       |       |
| 20  | 9.5   | 10.56 | 16.2  | 45  | 22    | 23.06 | 28.7  |
| 22  | 10.5  | 11.56 | 17.2  |     |       |       |       |
| 23  | 11    | 12.06 | 17.7  |     |       |       |       |
| 24  | 11.5  | 12.56 | 18.2  |     |       |       |       |
| 25  | 12    | 13.06 | 18.7  | 50  | 24.5  | 25.56 | 31.2  |
| 26  | 12.5  | 13.56 | 19.2  |     |       |       |       |
| 27  | 13    | 14.06 | 19.7  |     |       |       |       |
| 28  | 13.5  | 14.56 | 20.2  |     |       |       |       |
| 29  | 14    | 15.06 | 20.7  | 54  | 26.5  | 27.56 | 33.2  |
| 30  | 14.5  | 15.56 | 21.2  | 55  | 27    | 28.06 | 33.7  |
| 32  | 15.5  | 16.56 | 22.2  |     |       |       |       |
| 33  | 16    | 17.06 | 22.7  |     |       |       |       |
| 34  | 16.5  | 17.56 | 23.2  |     |       |       |       |
| 35  | 17    | 18.06 | 23.7  | 60  | 29.5  | 30.56 | 36.2  |

- NOTES:
- MATERIAL SEE TABLE;
  - PLATING SEE TABLE;
  - RATING
  - 3-1. OPERATING TEMPERATURE: -25~85°C
  - 3-2. OPERATING VOLTAGE: 50V AC/DC
  - 3-3. CURRENT RATING: 0.5 AMPS
  - 3-4. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC/Minute;
  - 3-5. INSULATION RESISTANCE: 500MΩ Min;
  - 3-6. CONTACT RESISTANCE: 0.03Ω Max;
  - PART NO.

60091-\*\*01-5001

SERIES

- Lead Free & HF
- 1&2=Lead Free
- 5&6=Halogen-Free

CIRCUIT NO.

Plating:

- 1=BRIGHT-TIN 80μ"Min
- OVER Ni 30μ"Min..

Packing Option:

- 0=Reel Packing
- 1=Tube Packing

| 序号 | 图号           | 名称              | 材料                  | 数量  | 附注                                  |
|----|--------------|-----------------|---------------------|-----|-------------------------------------|
| 4  | 122-0090-001 | 垫片 Fitting Nail | 磷青铜 Phosphor Bronze | 2   | 电镀(锡): 整个表面镀底镍30u"MIN,再镀锡 80u"MIN.. |
| 3  | 142-0090-001 | 脚 Actuator      | LCP(UL94V-0)        | 1   | 黑色                                  |
| 2  | 112-0090-001 | 端子 Contact      | 磷青铜 Phosphor Bronze | n×1 | 电镀(锡): 整个表面镀底镍30u"MIN,再镀锡 80u"MIN.. |
| 1  | 132-0090-001 | 盖 Housing       | LCP(UL94V-0)        | 1   | 白色                                  |

| GENERAL TOLERANCES |       | DRAWN BY       | 新富尔电子有限公司  |          |                |
|--------------------|-------|----------------|--|----------|----------------|
| 0.X                | ±0.25 | 赵婷婷/2016.11.30 | XINFUER ELECTORN CO.,LTD                             |          |                |
| 0.XX               | ±0.12 | 崔华文/2016.11.30 |  |          |                |
| 0.XXX              | ±0.05 | 洪新江/2016.11.30 |  |          |                |
| UNIT               | SIZE  | SCALE          | DRAWING NO.  | SHEET    | PROD. NAME     |
| MM                 | A4    | 1:1            | 006-0091-002   | 1 OF 1   | 0.5-11-nPLBF-A |
|                    |       |                | TITLE  | PART NO. |                |
|                    |       |                | 0.5 FPC CONN. ZIF SMT DRAWER H=2.65 VERTICAL CONTACT |          |                |

借用登记

旧底图总号

底图总号

签字

日期